


6700 Series AC wiring

120 VAC Wiring Compartment

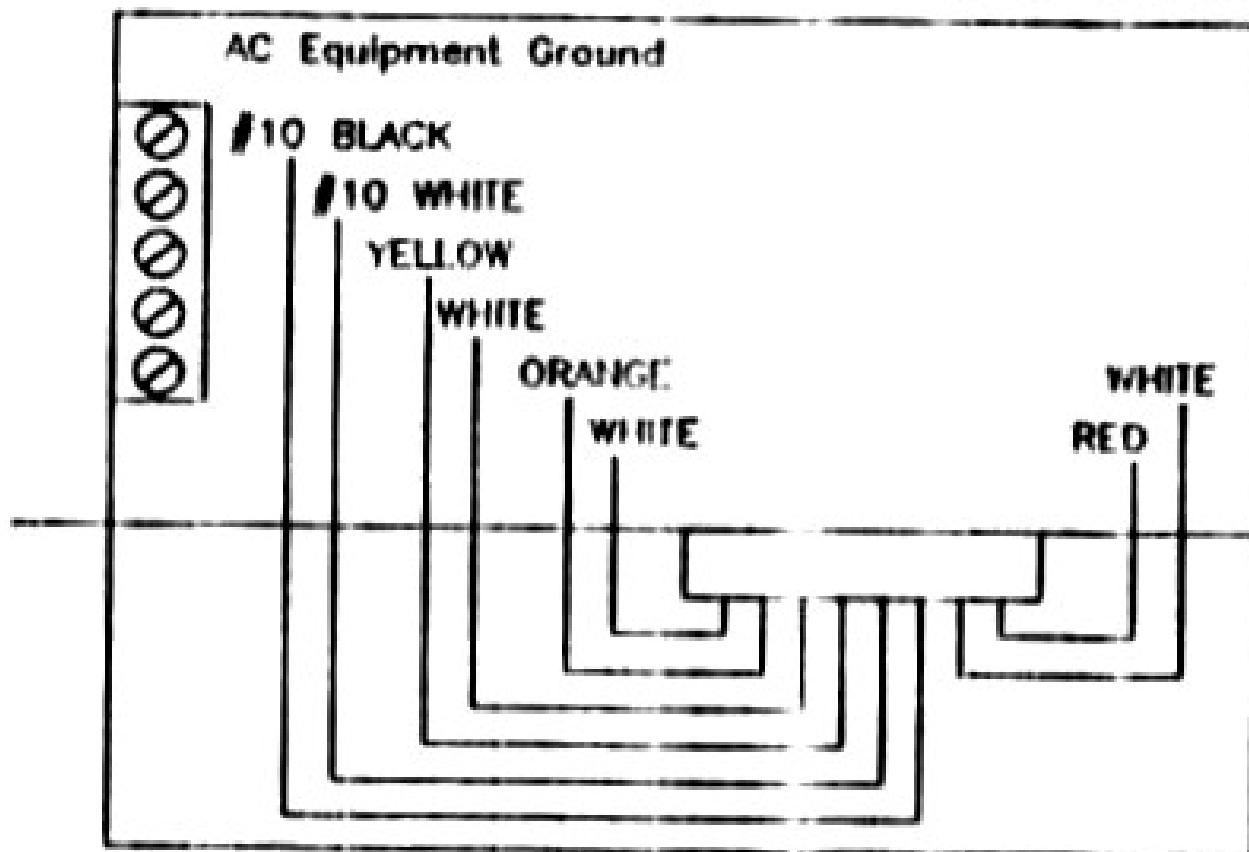

120 VAC Input: #10 BLACK & WHITE wires

AC branch circuit #1: YELLOW & WHITE wires

AC branch circuit #2: ORANGE & WHITE wires

AC branch circuit #3: RED & WHITE wires

Suitable for direct connection to 30 amp, 120 VAC recreational vehicle power supply assembly.

Use IDEAL #451 wire nuts, or equivalent, for branch circuit connections and IDEAL #452 wire nuts, or equivalent, for input circuit connections.

51092696-001

6700 Series DC wiring

12 Volt DC OUTPUT WIRING

RED WIRE— To Battery Positive
Connect to maximum 12 volt,
30 amp battery supply.

BLUE WIRE—Positive 12 volts
for DC appliances
(circuit #1)

BLUE/WHITE STRIPED WIRE
Positive 12 volts for DC
appliances (circuit #2)

BLUE/BLACK STRIPED WIRE—
Positive 12 volts for DC
appliances (circuit #3)

BLUE/RED STRIPED WIRE—
Positive 12 volts for DC
appliances (circuit #4)

WHITE WIRE—Negative for
12 GA circuits #1—#4
10 GA battery