
RAINFALL-CII SERIES

GLAZED CERAMIC WALL TILE







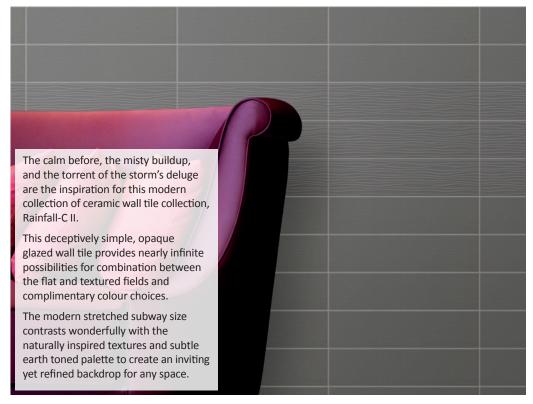

Wall

Nominal Sizes

3x6 Calm Matte - Plain

4x16 Calm Matte - Plain 4x16 Mist Gloss - Slight Relief

3x6 Calm Gloss - Plain 4x16 Calm Gloss - Plain 4x16 Torrent Gloss - Relief

Colours









Greige



Slate

Note: 4x16 Matte White Torrent Relief, 4x16 Matte White Mist Slight Relief, and

Decors and Special Pieces

Fog

Raindrop Mosaic Gloss



13x13 Sheet

Matte White Raindrop Mosaic also available

Special order: PB & QR Corner,

Pencil Bullnose, Quarter Round

Recommended applications



Characteristics of tile

Low maintenance	Fade resistant	Resistant to fungus
Stain resistant	Hypoallergenic	Odour resistant

Technical specifications

CGSB Type	5	MOHS	n/a
₹ PEI	n/a	Tile thickness	9.5 mm
Dynamic Coefficient of Friction	n/a	Chemical Resistance	GA Grade
Friction Coefficient	n/a	Variation	V1
Frost Resistance	n/a	Unifor	
Water Absorption	< 10%		

Special instructions

- Ceramic wall tile is suitable for all interior wall or ceiling applications including wet areas. Not suitable for demanding environments such as steam showers.
- Proper substrates, preparation and installation materials are required for a successful installation. For reference please see the TCNA 09300 Tile Handbook

