
PROVENZA DOT COM

THRU-BODY COMMERCIAL & RESIDENTIAL





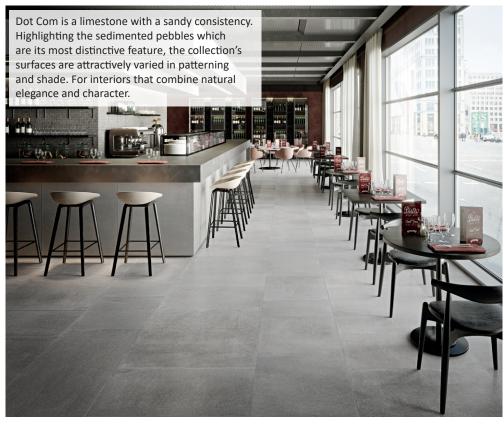

Nominal Sizes







Special Order with minimum quantity: 36x36 Natural, 36x36 Semi Polished, 36x36 Burattato, 18x36 Natural, 24x48 Natural, 24x24 Antislip

Colours





White



Grey



Mud Dark

Decors and Special Pieces



12x48 Decor (available in all colours)

Special Order with minimum quantity: 12x24 Mosaic Random, 12x12 Mosaic, 12x24 Listelli Sfalsati

Recommended applications







Characteristics of tile

Medium commercial





Technical specifications

Hypoallergenic

•					
Pattern Repeat	12x24: 40; 24x24: 20; 12x48 Decor: 18	МОНS		n/a	
₹ PEI	Dark: 2-3, Medium: 4, Light: 5	Tile thickness		10 mm	
Dynamic Coefficient of Friction	0.65	Chemical Resistance		Class GA	
Friction Coefficient	n/a	Variation	V1	V2 V3	V4
Frost Resistance	Yes			Moderate	
▲ Water Absorption	≤ 0.5%	A STREET	<u> </u>		

Special instructions

■ Shade variations between tiles is characteristic. Colour may vary from sample.

■ For rectangular tiles, for both floor and wall, are not recommended to be installed using a 50/50 brick pattern. The only brick patterns acceptable are 40/60 or 30/70.



