




## LED BACKLIT PANEL

### Tunable Wattage & CCT

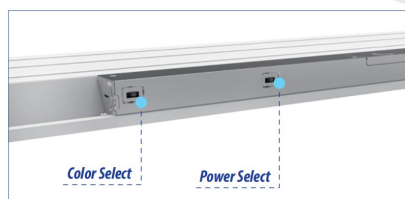

## PRODUCT FEATURES

- **TUNABLE POWER & CCT**
- White Finish Frame
- Back-lit LED Technology
- No LGP - Non-Yellowing Optical Lens
- 0-10V Dimming
- CRI > 80, PF > 0.9
- 120 - 277 Voltage Rating
- High Luminous Efficiency
- Flicker-free Lighting
- ETL Listed
- DLC Listed
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operational Temperature Range  
-4°F to 113°F (-20°C to 45°C)

## PRODUCT SPECIFICATIONS

| MODEL                           | ITEM #        | POWER (W) | LUMENS (LM) | CCT (K) | DIMENSIONS (in)      | EFFICIENCY (lm/W) |
|---------------------------------|---------------|-----------|-------------|---------|----------------------|-------------------|
| CLP14-40S1-UNV-D-8SC1-14-G-WH-S | L1X4BTUNCLP14 | 20        | 2200        | 3500    | 11.97 x 47.81 x 1.34 | 110               |
|                                 |               | 30        | 3300        | 4000    |                      |                   |
|                                 |               | 40        | 4400        | 5000    |                      |                   |
| CLP14-40S1-UNV-D-8SC1-22-G-WH-S | L2X2BTUNCLP14 | 20        | 2200        | 3500    | 23.78 x 23.78 x 1.30 | 110               |
|                                 |               | 30        | 3300        | 4000    |                      |                   |
|                                 |               | 40        | 4400        | 5000    |                      |                   |
| CLP14-50S-UNV-D-8SC1-24-G-WH-S  | L2X4BTUNCLP14 | 30        | 3300        | 3500    | 23.78 x 47.81 x 1.30 | 110               |
|                                 |               | 40        | 4400        | 4000    |                      |                   |
|                                 |               | 50        | 5500        | 5000    |                      |                   |

