

CB1650

16GA Brad Nailer



Air Pressure: 80-110 PSI


Max Air Pressure: 120 PSI

Air Fitting Size: 1/4" NPT

Loading

- Push the magazine latch and pull back cover (as shown).
- Load the fastener strips by resting on the bottom of the magazine.
Magazine Capacity: 115 fasteners.

- Push the Magazine cover forward until locked.

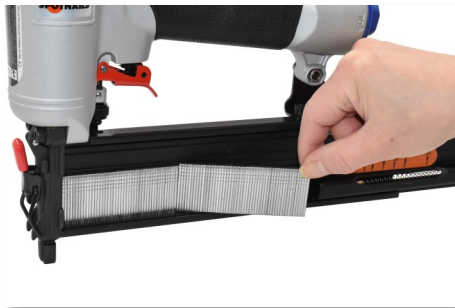

Actuation Modes

- Full Sequential Actuation Trigger
- Contact Actuation (Bump Fire) Trigger included.
- Swap the trigger to change the firing mode.



Depth Adjustment

- Turn the wheel clockwise to reduce the penetration (as shown).
- Turn the wheel counterclockwise for deeper penetration (as shown).
- Reducing or increasing the air pressure can also affect the depth of the drive.

