



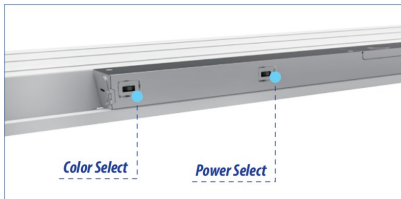

LED BACKLIT PANEL

Tunable Wattage & CCT

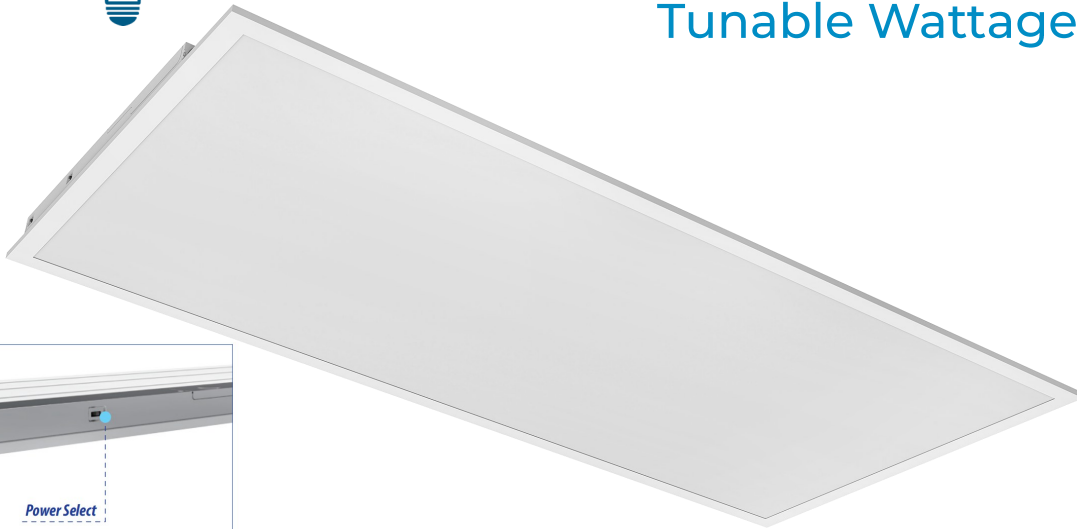

PRODUCT FEATURES

- **TUNABLE POWER & CCT**
- White Finish Frame
- Back-lit LED Technology
- No LGP - Non-Yellowing Optical Lens
- 0-10V Dimming
- CRI > 80, PF > 0.9
- 120 - 277 Voltage Rating
- IP20 - Damp Location Rated
- High Luminous Efficiency
- Flicker-free Lighting
- ETL Listed
- DLC Listed
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operational Temperature Range -4°F to 113°F (-20°C to 45°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (in)	EFFICIENCY (lm/W)
CLP14-40S1-UNV-D-8SC1-14-G-WH-S	L1X4BTUNCLP14	20	2200	3500	11.97 x 47.81 x 1.34	110
		30	3300	4000		
		40	4400	5000		
CLP14-40S1-UNV-D-8SC1-22-G-WH-S	L2X2BTUNCLP14	20	2200	3500	23.78 x 23.78 x 1.30	110
		30	3300	4000		
		40	4400	5000		
CLP14-50S1-UNV-D-8SC1-24-G-WH-S	L2X4BTUNCLP14	30	3300	3500	23.78 x 47.81 x 1.30	110
		40	4400	4000		
		50	5500	5000		

