


# LED-8016E 360° OMNI DIRECTIONAL DESIGN




## A21 high output & 120-277V

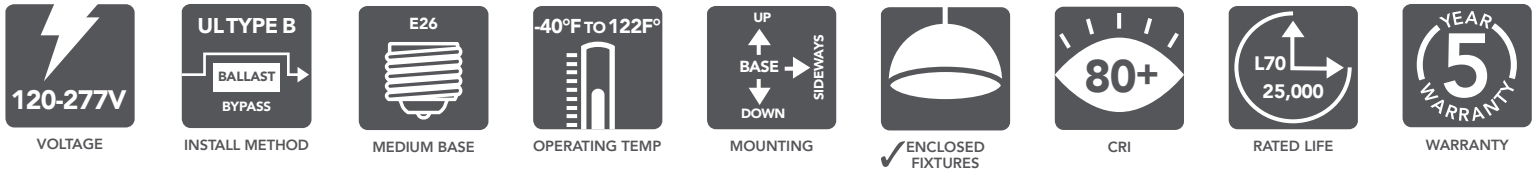

LED-8016E

safe for use in enclosed fixtures

- 16.5W replacing up to 125W incandescent.
- Multi-directional mounting capability & 360° design. Use base down, base up or base sideways without affecting performance.
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- Expertly engineered to work efficiently in enclosed fixtures & damp environments, while also protected against insects & dust.
- Energy Star approved.



PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE
LED-8016E30-A	844006023805	Up to 125W INCANDESCENT	16.5W	2000	3000K	E26
LED-8016E40-A	844006023799	Up to 125W INCANDESCENT	16.5W	2000	4000K	E26
LED-8016E50-A	844006023782	Up to 125W INCANDESCENT	16.5W	2000	5000K	E26



FOR PRODUCT INFO ("LED" MODEL #) CONTACT.....Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com  
 FOR PRODUCT INFO ("RP" MODEL #) CONTACT.....RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

03.20.19 Information is subject to change without notice.