

NPT350



34° Degree Framing Nailer

Applications

Framing, Wall Studs, Truss Attachments, Wall Panels, Rim & Floor Joists, Roof Decking, Blocking, Fencing

Specifications


Diameter	.113 - .131
Fastener Length	2" - 3-1/2"
Magazine Capacity	74-84
Actuation Mode	Full Sequential Actuation
Dimensions	18.9" x 4.72" x 12.99"
Weight	9.05 lbs
Operating Pressure	80-120 PSI
Air Inlet NPT	3/8"
Air Consumption per Cycle @ 90 PSI	0.082 L/cycle
Noise Power Emissions per EN12549 LwA,1s	112 dBA
Noise Pressure Emissions per EN12549 LpA,1s	99 dBA
Vibration Value per ISO-8662-11	8.697 m/s2
Vibration Value Uncertainty per ISO-8662-11	3.5 m/s2

Features

Adjustable Depth of Drive – quickly get the right nail depth, Aggressive Tooth Tip – ideal for toe nailing, Adjustable Exhaust Cap – deflects air away from user, Ergonomic Handle – for greater comfort, On Board Allen Wrench – readily accessible to adjust depth of drive and service tool, Rafter Hook – moves out of the way when not need

Includes

Allen Wrenches, Connector, Tool Oil, Bump Fire Trigger Kit

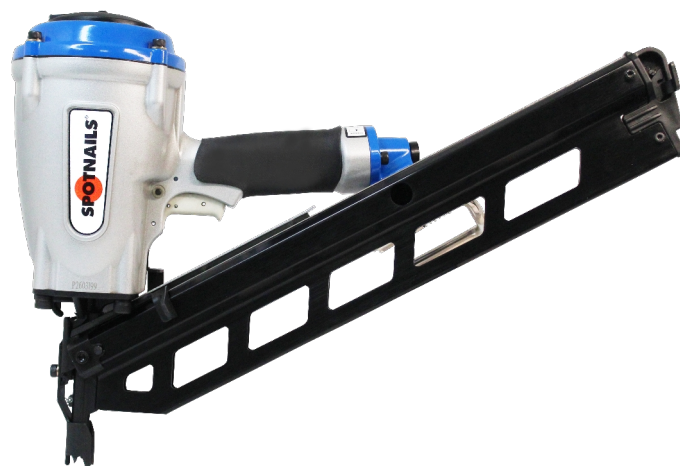

For Best Results, Use Spotnails® Collated Fasteners

30°- 34° Clipped Head Paper Tape Strip Nails

Stock No.	Length	Description
TD8D113R-5M	2-3/8" X .113	Ring, Bright
TD8D113RHDG	2-3/8" X .113	Ring, Hot Dipped Galvanized
TD8D120RHDG-2M	2-3/8" X .120	Ring, Hot Dipped Galvanized
TD10D120HDG	3" X .120	Hot Dipped Galvanized
TD10D120RHDG	3" X .120	Ring, Hot Dipped Galvanized
TD10D131-2.5M	3" X .131	Bright
TD10D131HDG	3" X .131	Hot Dipped Galvanized
TD12D131HDG	3-1/4" X .131	Hot Dipped Galvanized