

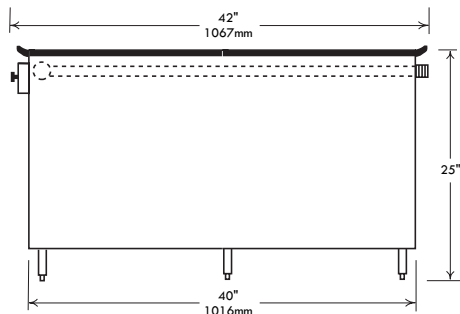




America's Oldest Stove Company
(Est. 1838)

JOB _____ ITEM # _____


STOCK POT STOVES



2CSP18



CSP18

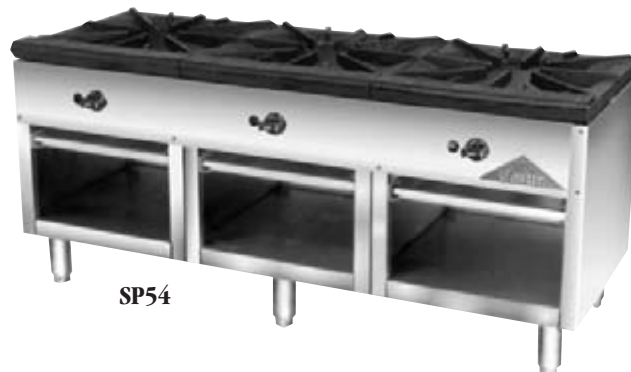

SP54

Standard Features & Benefits

CONSTRUCTION: Standard finish is easy cleaning stainless steel, welded together with corrosion resistant aluminized framing steel. Stainless steel front panel. 6" heavy duty pipe legs with adjustable feet. Installation clearances for non-combustible surfaces are 0" on the side and 4" in the rear, combustible surfaces are 5" and 5". Step up models available, call factory.

CONTROLS: Castle stock pot stoves are equipped with brass gas valves, automatic standing pilots, adjustable pressure regulators and cool to the touch control knobs.

BURNERS: CSP models feature a long life 3 ring, double venturi, cast iron burners rated up to a total of 110,000 BTU's per section. SP models feature a double ring, single venturi, cast iron burner rated at a total of 50,000 BTU's per section.

TOP GRATE: Heavy duty one piece cast iron top grate with cast in bull nose. Designed to accommodate pots as large as 18" & 20" in diameter.

TESTING: The gas system is tested before shipment. Optimal pressure is 4" WC for natural gas, 10" WC for propane.

ACCESSORIES: Tall frames, gas hoses, carrying handles, knob protectors and casters.

SPECIFICATIONS

Standard height is 25"

Model Number	Width in./mm.	Burner Sections	Total BTU	Approx. lbs/kgs
CSP-18	18/457	1	110K	130/59
SP-18	18/457	1	50K	120/55
2CSP-18	18/457	2	220K	275/125
2SP-18	18/457	2	100K	200/91
CSP-36	36/914	2	220K	250/114
SP-36	36/914	2	100K	180/82
2CSP-36	36/914	4	440K	550/250
2SP-36	36/914	4	220K	380/173
CSP-54	54/1372	3	330K	440/200
SP-54	54/1372	3	150K	270/123
2CSP-54	54/1372	6	660K	800/364
2SP-54	54/1372	6	300K	575/261

Prefix "2" signifies 42" depth, standard is 22".



Comstock-Castle Stove Co. • 119 W. Washington • Quincy, IL 62301 USA
Tel.: 217-223-5070 • Telefax: 217-223-0007 • www.castlestove.com

