
# **KIRKBY**

## **GLAZED PORCELAIN**





#### **Nominal Sizes**

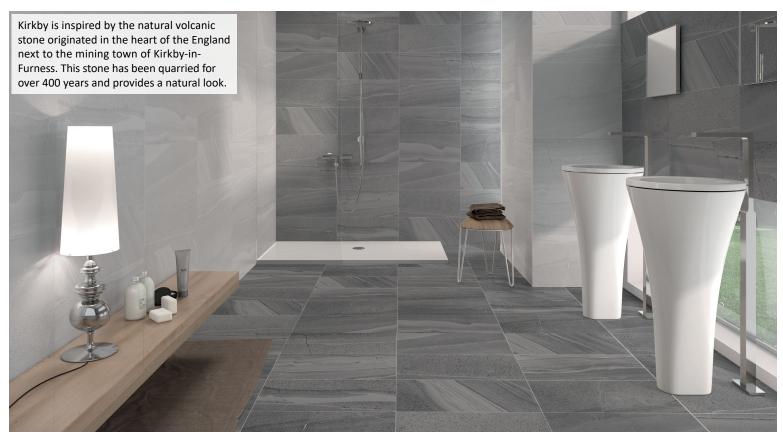

12x24




#### **Colours**



White




Pebble



# **Recommended applications**

Residential	Bath / Shower	Floor
Light commercial	Fireplace	Indoor
Medium commercial	Wall	Outdoor

### **Characteristics of tile**



# **Technical specifications**

Pattern Repeat	18	<b>W</b> MOHS	6
<b>₹</b> PEI	Slate 2; Pebble 3; White 4	Tile thickness	7.8 mm
Dynamic Coefficient of Friction	0.38	Chemical Resistance	GA
Friction Coefficient	n/a	Variation	V1 V2 V3 V4
Frost Resistance	Yes		Moderate
Water Absorption	≤ 0.5%	34%	

## **Special instructions**

Shade variations between tiles is characteristic. Colour may vary from sample.
 For rectangular tiles, for both floor and wall, are not recommended to be installed

using a 50/50 brick pattern. The only brick patterns acceptable are 40/60 or 30/70.



