

# W1S4840W6



## 18GA NARROW CROWN WOOD FLOORING TOOL


For 3/8" - 5/8" engineered wood flooring, tongue & groove and Valinge type click locking system.

**Air Pressure: 80-110 PSI**


**Max Air Pressure: 120 PSI**

**Air Fitting Size: 1/4" NPT**

### Tool Setup

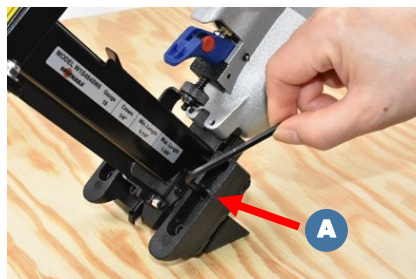


Loosen the four screws (A) and push the two stabilizing feet up to the highest position, then tighten these screws slightly.

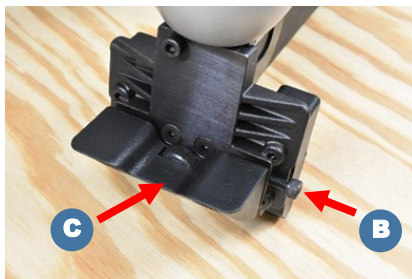

Loosen triangle base screw (B).

Adjust the triangle base by using the adjustment wheel (C) for a proper nose location (D).

Tighten triangle base screws (B).

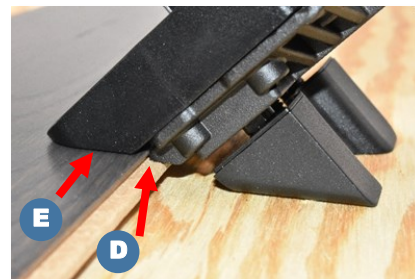

Push two stabilizing feet down until they are in full contact (E) with the hardwood flooring surface.

Tighten four screws (A).

### Actuation Modes


Selectable Actuation Trigger

Sequential Trigger (Restrictive) available (AS-21040)

Turn the red button to switch the firing mode.

1. Full Sequential Actuation (Factory Preset)

2. Contact Actuation (Bump Fire)



### Loading

- Pull the magazine pusher back until locked.
  - Load the fastener strips (Use 18GA 1-3/8" Nylon staples to increase the holding power).
- Magazine Capacity:** 168 fasteners.



### Depth Adjustment

- Turn the wheel clockwise to reduce the penetration.
- Turn the wheel counterclockwise for deeper penetration.
- Reducing or increasing the air pressure can also affect the depth of the drive.



\* Test fire the tool into the flooring to insure the proper staple location and the penetration (F).

\* Adjust the wheel if tool does not fire when placed in position which will allow the safety to engage.

