



STAINLESS STEEL  
**ECONOMY EQUIPMENT STANDS**



**Item #:** \_\_\_\_\_ **Qty #:** \_\_\_\_\_  
**Model #:** \_\_\_\_\_  
**Project #:** \_\_\_\_\_



*Featuring as Standard:*  
 THE PROVEN  
 ORIGINAL ADVANCE TABCO  
 Adjustable Undershelf  
 with Die Cast Leg Clamp

Length	24" Wide	Wt.	30" Wide	Wt.
24"	<b>EG-LG-242</b>	43 lbs.	<b>EG-LG-302</b>	47 lbs.
36"	<b>EG-LG-243</b>	50 lbs.	<b>EG-LG-303</b>	62 lbs.
48"	<b>EG-LG-244</b>	68 lbs.	<b>EG-LG-304</b>	78 lbs.
60"	<b>EG-LG-245</b>	80 lbs.	<b>EG-LG-305</b>	84 lbs.
72"	<b>EG-LG-246</b>	96 lbs.	<b>EG-LG-306</b>	110 lbs.

**Optional X.H.D. Casters**  
 TA-255 Set of 4  
 Each Set supplied with 2 brakes.

**FEATURES:**

TOP is furnished with 1" hemmed edge splash on rear and both sides.  
 Undershelf is adjustable.  
 Aluminum die cast "leg to shelf" clamp secures shelf to leg eliminating unsightly nuts and bolts.

**CONSTRUCTION:**

All TIG welded. Exposed weld areas finished to match adjacent surfaces.  
 Entire Top is mechanically polished to a satin finish and is sound deadened.  
 Galvanized hat channels are secured to top by means of structural adhesive and weld studs.  
 Gussets welded to support hat sections.

**MATERIAL:**

TOP is 18 gauge stainless steel type "430" series with galvanized understructure.  
 SHELF is galvanized steel.  
 LEGS are 1 5/8" diameter galvanized steel with plastic bullet feet.


 www.advancetabco.com	<b>Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.</b> Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933			
	<b>NEW YORK</b> Fax: (631) 242-6900	<b>GEORGIA</b> Fax: (770) 775-5625	<b>TEXAS</b> Fax: (972) 932-4795	<b>NEVADA</b> Fax: (775) 972-1578

# DETAILS and SPECIFICATIONS



TOL  $\pm$  .500"

ALL DIMENSIONS ARE TYPICAL

Maximum Total Load = 400 lbs.

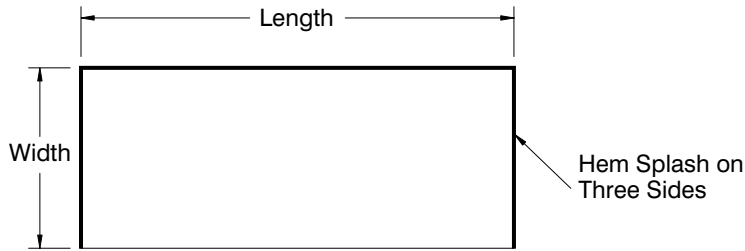

24" Working Height

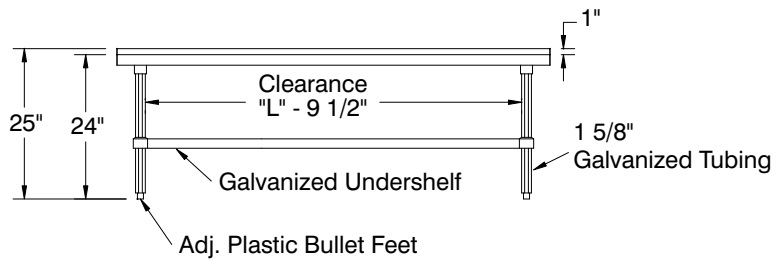

## Mobile Unit

Optional X.H.D. Casters  
TA-255 Set of 4  
Each Set supplied with 2 brakes.

