Manufacturer PDF Provided by www.southeasternequipment.net

IPC EAGLE

SWEEPERS - RIDER

1050

The 1050 Sweeper is the perfect step up to higher productivity from walk behind units. It is small enough to go through a 32" opening but is large enough to clean a 42" path with ease.

MOST FREQUENT USE

RETAIL

HOSPITALITY

CLEANING CONTRACTORS

EDUCATION



CONTROL PANEL



LARGE CAPACITY



BATTERY BOX

MAX PRODUCTIVITY	BATTERY RUN TIME	KEY SPECS
55,000 ft^2/h	3.0–4.8 h	42" cleaning path 19 gal capacity




INNOVATIONS

SOFT CLEANING SURFACE

Manufacturer PDF Provided by www.southeasternequipment.net

SLS™
SELF-LEVELLING SYSTEM

SLS ™ System can be electric or mechanical and allows great cleaning performances thanks to a constant pressure on the floor.

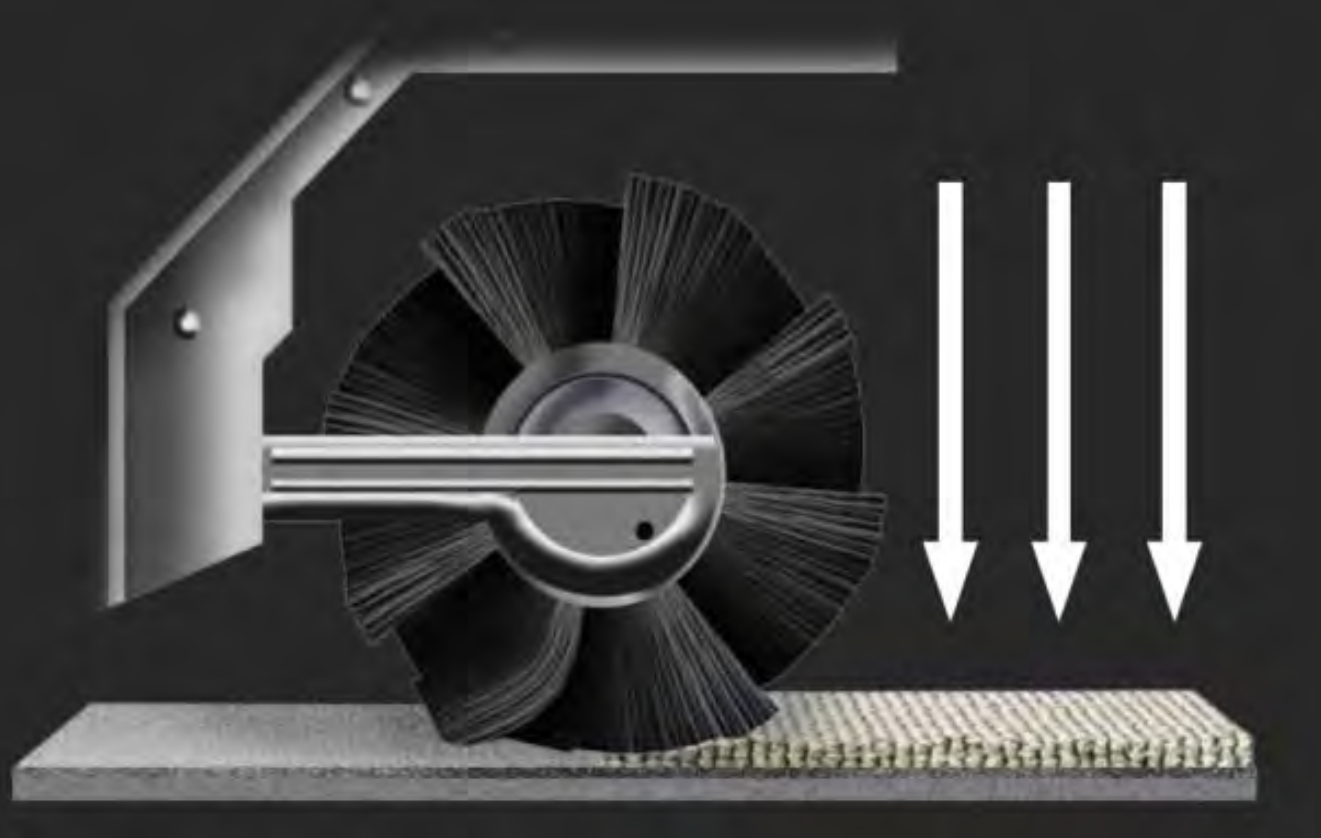

Manufacturer PDF Provided by www.southeasternequipment.net

1050



.01 LARGE HOPPER CAPACITY

.02 SELF-LEVELING BRUSH

.03 TILTABLE TANK

.04 EASY ACCESS TO INTERNAL COMPONENTS

Other Features

- Maximum protection against impact
- Large sweeping path
- SLS (Self-Leveling System) automatic main brush pressure control
- Dust micro filtration
- Dust flap for large debris collection
- Pre-programmed working settings
- Adjustable side brush rpm
- Heavy duty chassis in fully coated steel
- Easy to use control panel
- Great working visibility
- Automatic stop (by pedal release) in working mode
- Manual low dump discharge system
- Main brush replacement without tools
- Dust filter replacement without tools
- Self cleaning filter system
- Automatic main brush lift in reverse

Manufacturer PDF Provided by www.southeasternequipment.net

1050

		1050
Max working width	in/ mm	42"/ 1050 mm
Main brush width	in/ mm	26"/ 650 mm
Highest productivity	ft²/h - m²/h	55,333 ft²/ 5,140 m²
Dirt container volume	gal	19 gal/ 70 l
Weight	lbs/ kg	679 lbs/ 308 kg
Dimensions	inches	56 x 33 x 45
Power supply	V	24 v
Filter surface	ft²/ m²	44 ft²/ 4 m²
Electric filter shaker		Automatic
Noise level	dB	63 dB

AVAILABLE ACCESSORIES

12V 210 AH BATTERY
12V210



12V 230 AH BATTERY
12V100-AGM



6V 225 AGM BATTERY
12V140-AGM



CHARGER WET/ GEL
BACA00136



BATTERY WATERING SYSTEM
CR-BWS-L-4



GET RIGHT SIZED

	Description	Continuous run-time	Theoretical ft²/ h	Maximum Theoretical ft²/charge	Ft² charge efficiency (70%)
1050	210 ah Battery	4.0	55,333	221,331	154,932
1050	225ah AGM Battery	3.0	55,333	165,998	116,119
1050	230ah AGM Battery	4.8	55,333	265,597	185,918

IPC Eagle Corporation
3650 Dodd Road Eagan, MN 55123
800-486-2775
info@ipceagle.com