




23-24

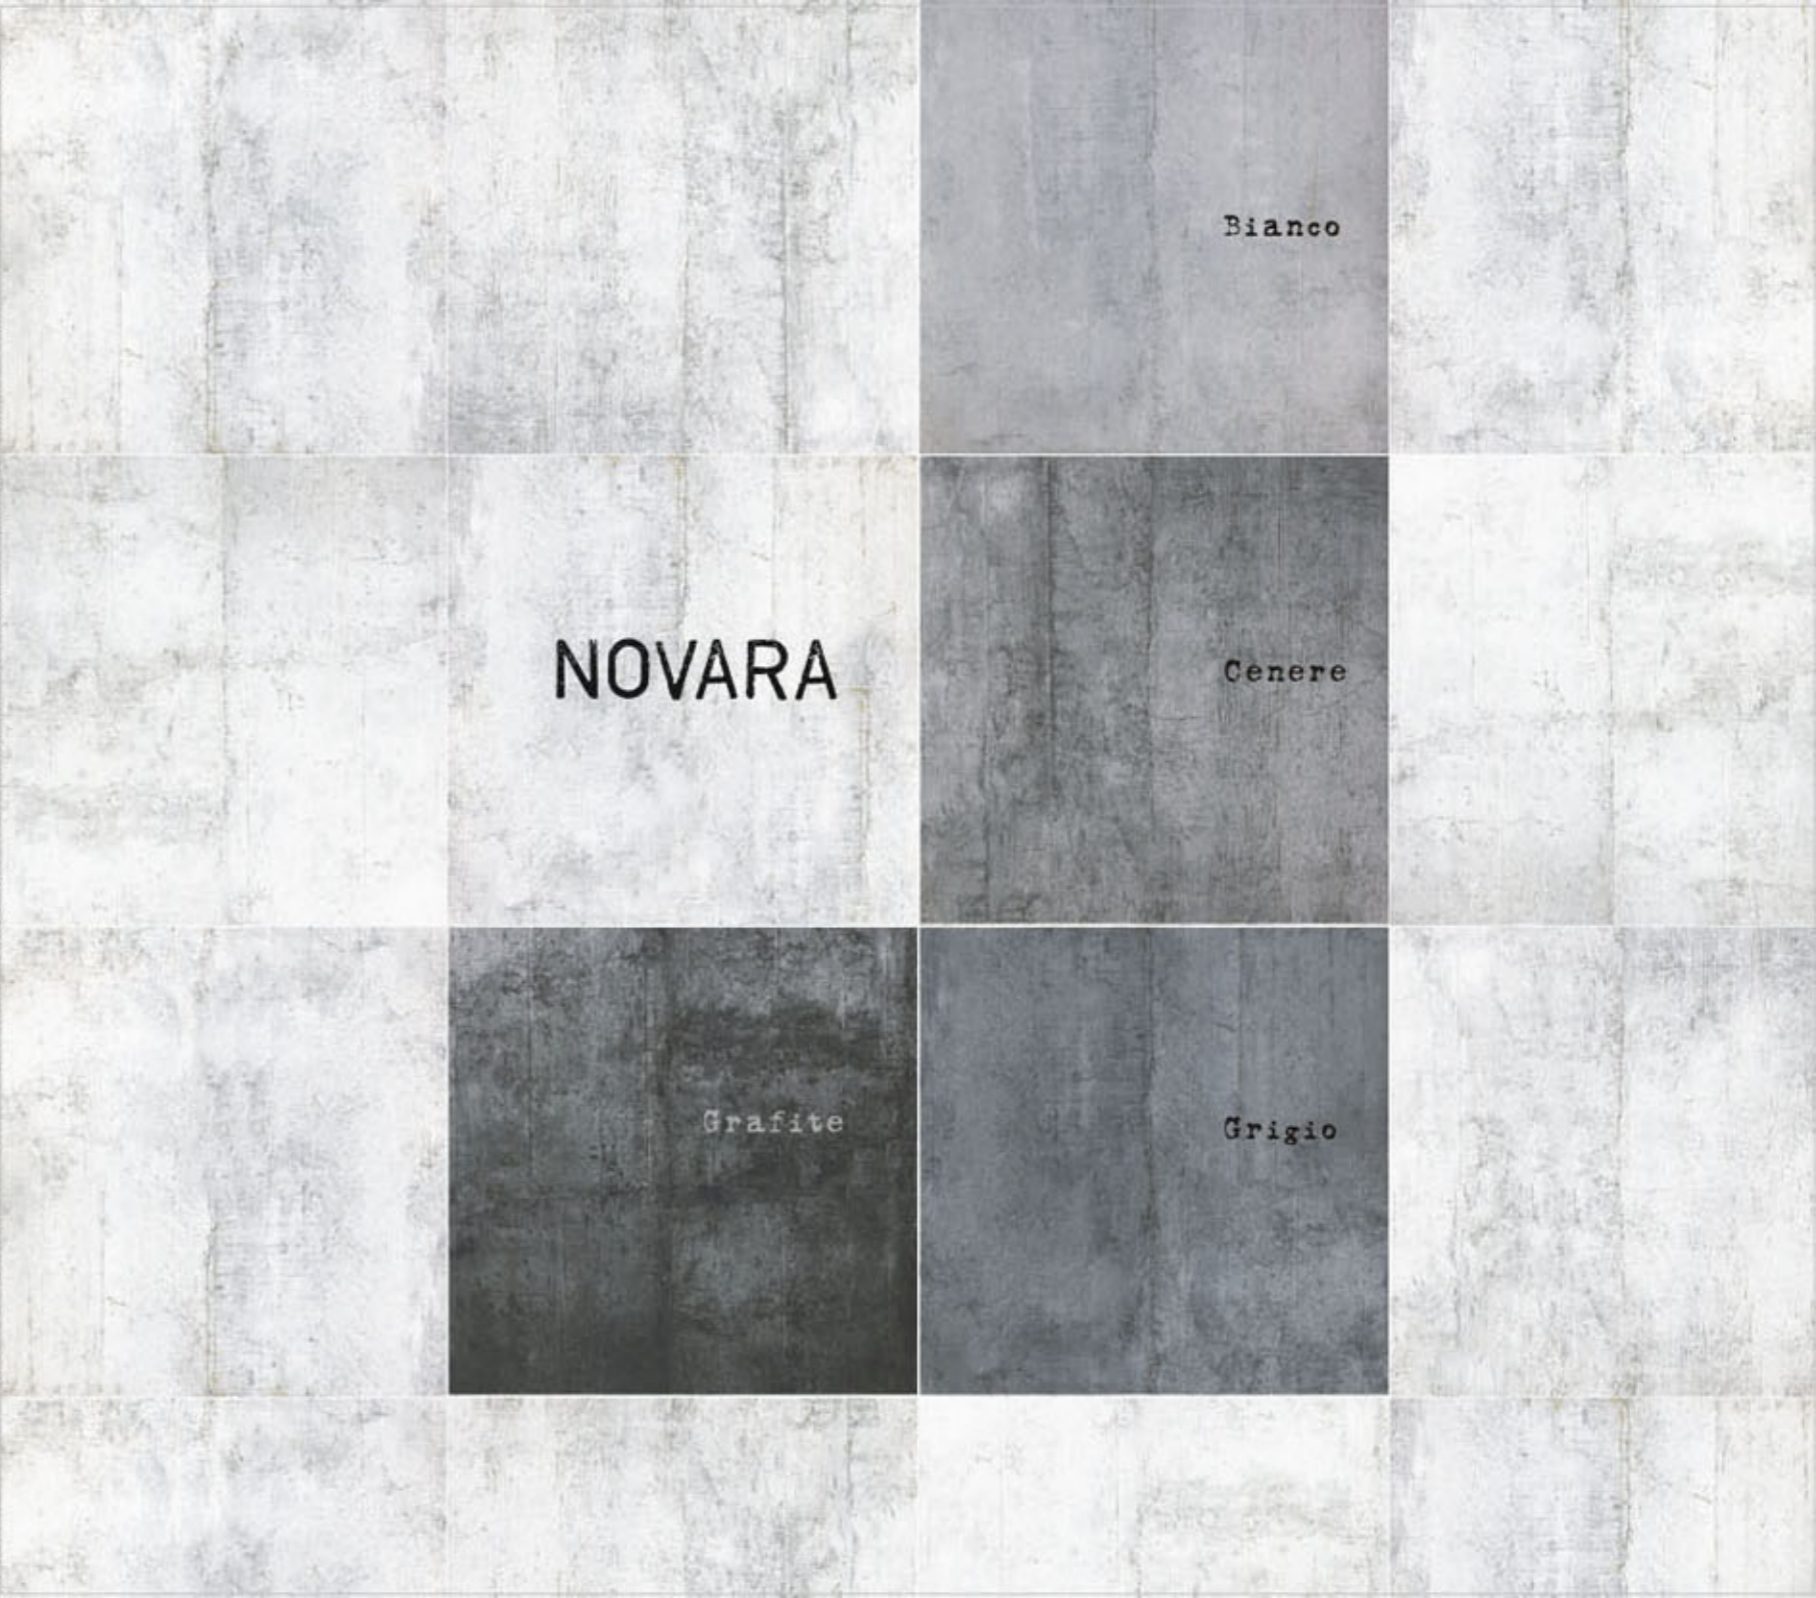

NOVARA

Bianco

Cenere

Grafite

Grigio



NOVARA

Grigio

600X600MM

24"X24"




NOVARA

Bianco

600X600MM

24"X24"



NOVARA

Grigio

600X600MM

24"X24"


NOVARA



Bianco



Cenere

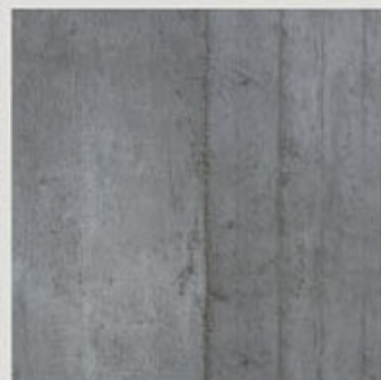

Grigio



Grafite

All Size



Bianco
600x600MM / 24"x24"

Cenere
600x600MM / 24"x24"

Grigio
600x600MM / 24"x24"

Grafite
600x600MM / 24"x24"



Bianco
300x600MM / 12"x24"

Cenere
300x600MM / 12"x24"

Grigio
300x600MM / 12"x24"

Grafite
300x600MM / 12"x24"



Bianco
150x600MM / 6"x24"

Cenere
150x600MM / 6"x24"

Grigio
150x600MM / 6"x24"

Grafite
150x600MM / 6"x24"

Packing List

FORMAT	PCS/BOX	MQ/BOX	KG/BOX	BOX/PALLET	MQ/PALLET	KG/PALLET
 600x600	 4	 1.44	 32	 40	 57.60	 1280
 300x600	 8	 1.44	 32	 40	 57.60	 1280
 150x600	 16	 0.72	 16	 40	 57.60	 1280

Shades Variation V3



Aspetto Uniforme
Uniform Appearance
V1



Lieve Variazione
Slight Variation
V2

















Moderata Variazione
Moderate Variation
V3



Forte Variazione
Substantial Variation
V4

TECHNOLOGICAL FEATURES

	<i>Florina</i> CERAMIC	EU NORM	PRC NORM	FLORINA VALUE
	LENGTH	± 0.6	$\pm 0.5\%$	$\pm 0.5\%$
	WIDTH	± 0.6	$\pm 0.5\%$	$\pm 0.5\%$
	THICKNESS	± 5	$\pm 5\%$	$\pm 5\%$
	PLANARITY		$\pm 0.4\%$	$\pm 0.2\%$
	STRAIGHTNESS OF EDGES	± 0.5	$\pm 0.3\%$	$\pm 0.3\%$
	SQUARENESS	± 0.6	$\pm 0.5\%$	$\pm 0.5\%$
	WATER ABSORPTION	≤ 1.0	Average $\leq 0.5\%$ Individual $\leq 0.6\%$	Average $\leq 0.5\%$
	BREAKING STRENGTH		$\geq 1300N$	$\geq 1300N$
	MODULUS OF RUPTURE	≥ 17.5	$\geq 35MPa$	$\geq 35MPa$
	STAIN RESISTANCE	EN 187: Class A, Minimum Grade B	\geq Grade GB	\geq Grade GA
	RADIOACTIVITY			GB6566-2010. A Category
	RESISTANCE TO ABRASION		Report the Attrition Grade Turnover Number	≥ 1500 Turns \geq Grade 3
	FROST RESISTANCE	No Crack at Freeze-Thaw Cycles for 100 Times (-5°C -5°C)	No Cracks or Exfoliation after Testing	No Cracks or Exfoliation after Testing
	GLAZE CRACK RESISTANCE	No Fracture Once per Two Hours at the Pressure of 500 KPA		