




LED-8036M 100W High Bay / Low Bay Retrofit

Models
 LED-8036MXX-A, 120-277VAC, cULus, 4000K & 5700K CCT
 LED-8036MXXC-A, 347VAC, cUL, 4000K or 5700K CCT

Description
 Light Efficient Design's High Bay retrofits replace HID lamps up to 250W HID. Advanced Active Cooling technology improves thermal performance and delivers the highest light output along with longer LED and driver life versus lamps limited to passive cooling. All models are tested by UL under 1598C that insures that retrofitted fixture retains safety certification as well as approved by UL for enclosed fixtures.

Features
 100W LED Replaces 250W MH or HPS HID Lamps
 Up to 11,015 lumen output and 112 LPW efficacy
 Available in EX39 Mogul screw base
 UL approved for damp environments and enclosed fixtures
 Advanced active cooling: Active cooling and dynamic temperature control
 Integrated 6kA surge
 50,000 hour rated LED life (supported by LM80 and ISTMT reports (see website)
 5 Year Limited Warranty - see website for details
 Insect/dust resistant housing

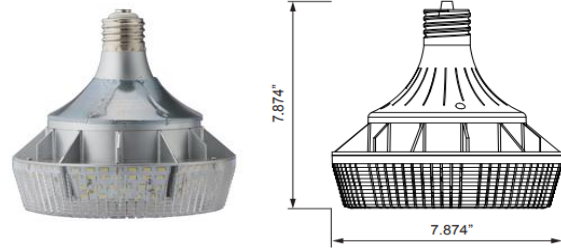

TECHNICAL SPECIFICATIONS - USA 120-277V - ALL MODELS cULus

MODEL	VOLTAGE	WATTAGE	LUMENS*	LPW*	REPLACES	BASE	CCT	CRI*	THD*	PF*	R9*	Duv*	LIGHT DISTRIBUTION	DIMMABLE
LED-8036M40-A	120-277V	100W	10656	110	250W HID	EX39 Protected Mogul	4000K	85.3	0.1463	96	20	-0.0008	Directional / 180°	No
LED-8036M57-A			10798	112			5700K	85.1	0.1493	96	15	0.0025		

TECHNICAL SPECIFICATIONS - CANADA 347V - ALL MODELS CuI

MODEL	VOLTAGE	WATTAGE	LUMENS*	LPW*	REPLACES	BASE	CCT	CRI*	THD*	PF*	R9*	Duv*	LIGHT DISTRIBUTION	DIMMABLE
LED-8036M40C-A	347V	100W	10902	110	250W HID	EX39 Protected Mogul	4000K	84.7	0.1573	94	17	-0.0004	Directional / 180°	No
LED-8036M57C-A			11015	111			5700K	85	0.1516	94	14	0.0022		

PACKAGING SPECIFICATIONS

MODEL	PRODUCT DIMENSION	PRODUCT WEIGHT	UNIT CARTON DIMENSION	UNIT CTN WT	SHIPPER CARTON DIMENSION	SHIPPER CTN WT	CARTON QUANTITY
LED-8032M	7.75 X 7.9 in.	2.76 Lbs	10 X 10 X 9.6 in.	3.81 lbs.	20.6 X 10.6 X 19.9 in.	16.9 Lbs	4

UPC / UCC

DESIGN LIGHTS CONSORTIUM QPL CERTIFICATION SUMMARY (E39 MODELS ONLY)

MODEL	PRODUCT UPC	CARTON UCC	QPL CATEGORY 1	PRODUCT CODE	FAMILY CODE	QPL CATEGORY 2	PRODUCT CODE	FAMILY CODE
LED-8032M40-A	8440060 8150 8	10 8440060 8150 5	Replacement Lamps for High-Bay Luminaires (Type B)	P3SQAQX7	RRRSVL	N/A	N/A	N/A
LED-8032M57-A	8440060 8151 5	10 8440060 8151 2	Replacement Lamps for High-Bay Luminaires (Type B)	P9Z5V2C4	RRRSVL	N/A	N/A	N/A
LED-8032M40C-A	8440060 8173 7	10 8440060 8173 4	Replacement Lamps for High-Bay Luminaires (Type B)	P3SQAQX7	RRRSVL	N/A	N/A	N/A
LED-8032M57C-A	8440060 8174 4	10 8440060 8174 1	Replacement Lamps for High-Bay Luminaires (Type B)	P9Z5V2C4	RRRSVL	N/A	N/A	N/A

ENERGY SAVING vs. HID

ZONAL LUMENS/ LUX DISTANCE DATA (see LM79 for more information)

Mounting Orientation

LED Lamp Power (watts)	100	<table border="1"> <thead> <tr> <th colspan="3">Zonal Lumen Summary</th> <th colspan="6">Lumens Per Zone</th> </tr> <tr> <th>Zone</th> <th>Lumens</th> <th>% Luminaire</th> <th>Zone</th> <th>Lumens</th> <th>% Total</th> <th>Zone</th> <th>Lumens</th> <th>% Total</th> </tr> </thead> <tbody> <tr> <td>0-30</td> <td>2,510.4</td> <td>23.3%</td> <td>0-10</td> <td>285.8</td> <td>2.6%</td> <td>90-100</td> <td>490.0</td> <td>4.5%</td> </tr> <tr> <td>0-40</td> <td>4,152.0</td> <td>38.5%</td> <td>10-20</td> <td>884.5</td> <td>8.2%</td> <td>100-110</td> <td>392.2</td> <td>3.6%</td> </tr> <tr> <td>0-60</td> <td>7,037.0</td> <td>65.2%</td> <td>20-30</td> <td>1,340.1</td> <td>12.4%</td> <td>110-120</td> <td>296.0</td> <td>2.7%</td> </tr> <tr> <td>60-90</td> <td>2,227.2</td> <td>20.6%</td> <td>30-40</td> <td>1,641.6</td> <td>15.2%</td> <td>120-130</td> <td>181.0</td> <td>1.7%</td> </tr> <tr> <td>70-100</td> <td>1,778.6</td> <td>16.5%</td> <td>40-50</td> <td>1,634.2</td> <td>15.1%</td> <td>130-140</td> <td>107.3</td> <td>1%</td> </tr> <tr> <td>90-120</td> <td>1,178.2</td> <td>10.9%</td> <td>50-60</td> <td>1,250.8</td> <td>11.6%</td> <td>140-150</td> <td>47.0</td> <td>0.4%</td> </tr> <tr> <td>0-90</td> <td>9,264.2</td> <td>85.8%</td> <td>60-70</td> <td>938.6</td> <td>8.7%</td> <td>150-160</td> <td>14.8</td> <td>0.1%</td> </tr> <tr> <td>90-180</td> <td>1,533.1</td> <td>14.2%</td> <td>70-80</td> <td>745.8</td> <td>6.9%</td> <td>160-170</td> <td>3.8</td> <td>0%</td> </tr> <tr> <td>0-180</td> <td>10,797.3</td> <td>100%</td> <td>80-90</td> <td>542.8</td> <td>5.0%</td> <td>170-180</td> <td>1.0</td> <td>0%</td> </tr> </tbody> </table>	Zonal Lumen Summary			Lumens Per Zone						Zone	Lumens	% Luminaire	Zone	Lumens	% Total	Zone	Lumens	% Total	0-30	2,510.4	23.3%	0-10	285.8	2.6%	90-100	490.0	4.5%	0-40	4,152.0	38.5%	10-20	884.5	8.2%	100-110	392.2	3.6%	0-60	7,037.0	65.2%	20-30	1,340.1	12.4%	110-120	296.0	2.7%	60-90	2,227.2	20.6%	30-40	1,641.6	15.2%	120-130	181.0	1.7%	70-100	1,778.6	16.5%	40-50	1,634.2	15.1%	130-140	107.3	1%	90-120	1,178.2	10.9%	50-60	1,250.8	11.6%	140-150	47.0	0.4%	0-90	9,264.2	85.8%	60-70	938.6	8.7%	150-160	14.8	0.1%	90-180	1,533.1	14.2%	70-80	745.8	6.9%	160-170	3.8	0%	0-180	10,797.3	100%	80-90	542.8	5.0%	170-180	1.0	0%	<table border="1"> <thead> <tr> <th>BASE DOWN</th> <th>BASE UP</th> <th>HORIZONTAL</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td>APPROVED</td> <td>APPROVED</td> <td>APPROVED</td> </tr> </tbody> </table>	BASE DOWN	BASE UP	HORIZONTAL				APPROVED	APPROVED	APPROVED
Zonal Lumen Summary			Lumens Per Zone																																																																																																												
Zone	Lumens		% Luminaire	Zone	Lumens	% Total	Zone	Lumens	% Total																																																																																																						
0-30	2,510.4		23.3%	0-10	285.8	2.6%	90-100	490.0	4.5%																																																																																																						
0-40	4,152.0		38.5%	10-20	884.5	8.2%	100-110	392.2	3.6%																																																																																																						
0-60	7,037.0		65.2%	20-30	1,340.1	12.4%	110-120	296.0	2.7%																																																																																																						
60-90	2,227.2	20.6%	30-40	1,641.6	15.2%	120-130	181.0	1.7%																																																																																																							
70-100	1,778.6	16.5%	40-50	1,634.2	15.1%	130-140	107.3	1%																																																																																																							
90-120	1,178.2	10.9%	50-60	1,250.8	11.6%	140-150	47.0	0.4%																																																																																																							
0-90	9,264.2	85.8%	60-70	938.6	8.7%	150-160	14.8	0.1%																																																																																																							
90-180	1,533.1	14.2%	70-80	745.8	6.9%	160-170	3.8	0%																																																																																																							
0-180	10,797.3	100%	80-90	542.8	5.0%	170-180	1.0	0%																																																																																																							
BASE DOWN	BASE UP	HORIZONTAL																																																																																																													
APPROVED	APPROVED	APPROVED																																																																																																													
HID Lamp Power (watts)	250		<table border="1"> <thead> <tr> <th colspan="2">THERMAL SPECIFICATIONS</th> </tr> <tr> <th>OPERATING TEMPERATURE</th> <td>-40°F to +122°F</td> </tr> </thead> <tbody> <tr> <td colspan="2">IN-SITU TEMP MEASUREMENT/L70</td> </tr> <tr> <td>Width</td> <td>12</td> </tr> <tr> <td>Height</td> <td>12</td> </tr> <tr> <td colspan="2">LED TEMPERATURE*</td> </tr> <tr> <td colspan="2">L70 LED LUMEN MAINTAINANCE*</td> </tr> <tr> <td colspan="2">* FROM ISTMT REPORT AT 77°F</td> </tr> </tbody> </table>	THERMAL SPECIFICATIONS		OPERATING TEMPERATURE	-40°F to +122°F	IN-SITU TEMP MEASUREMENT/L70		Width	12	Height	12	LED TEMPERATURE*		L70 LED LUMEN MAINTAINANCE*		* FROM ISTMT REPORT AT 77°F																																																																																													
THERMAL SPECIFICATIONS																																																																																																															
OPERATING TEMPERATURE	-40°F to +122°F																																																																																																														
IN-SITU TEMP MEASUREMENT/L70																																																																																																															
Width	12																																																																																																														
Height	12																																																																																																														
LED TEMPERATURE*																																																																																																															
L70 LED LUMEN MAINTAINANCE*																																																																																																															
* FROM ISTMT REPORT AT 77°F																																																																																																															
HID Ballast Power (watts)	37.5																																																																																																														
Total power Savings (watts)	187.5																																																																																																														
Annual Energy Savings	\$ 105																																																																																																														
Lifetime Energy Savings over 50,000 hrs	\$ 1,031																																																																																																														