

T1S6825S

18GA MEDIUM CROWN STRING FEED STAPLER




Air Pressure: 80-110 PSI

Max Air Pressure: 120 PSI

Air Fitting Size: 1/4" NPT

Loading

- Pull the magazine pusher back until locked (as shown).
- Load the fastener strips. **Magazine Capacity:** 168 fasteners.
- Unlock the pusher.

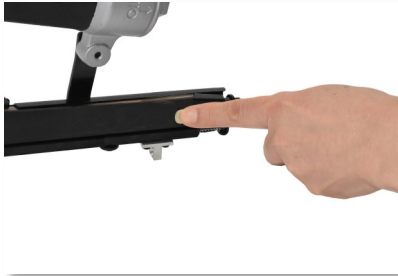

- Install the string (as shown).


Actuation Modes

Selectable Actuation Trigger

Sequential (Restrictive) Trigger (AS-21040) available .

Turn the red button to switch the firing mode.

1. Full Sequential Actuation
(Factory Preset)



2. Contact Actuation
(Bump Fire)



Depth Adjustment

- Turn the wheel clockwise to reduce the penetration (as shown).
- Turn the wheel counterclockwise for deeper penetration (as shown).
- Reducing or increasing the air pressure can also affect the depth of the drive.

