

BOT-3222C-AP

BOTTOMER STAPLER - ARM PNEUMATIC




Air Pressure: 80-110 PSI

Max Air Pressure: 120 PSI

Air Fitting Size: 1/4" NPT

Assembly

- Install the balancer "D" (as shown).
- Connect the quick exhaust valve "E" with the cylinder.
- Connect the pedal switch "F" (A with A1, B with B1, C with C1).
- Read the included manual for more details.

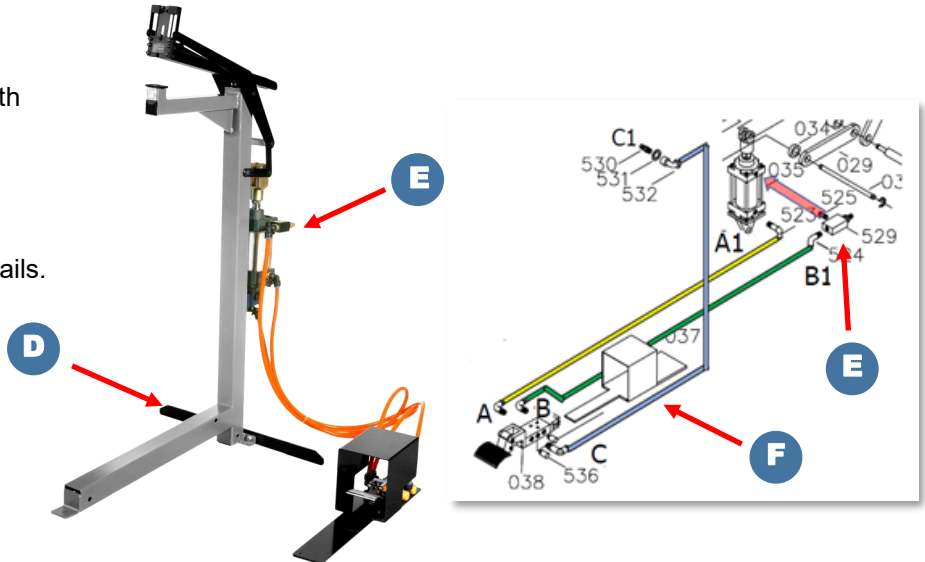

Loading

- Keep your foot away from the pedal when loading.
- Pull the pusher back until it stops then rotate to down position (as shown).
- Insert 4 strips of appropriate staples into the magazine from the rear.
- Pull the pusher back to upright position. Gently slide the pusher forward against the staples.
- **Magazine Capacity:** 300 fasteners.



Operating

- Connect the air supply line to the bottomer.
- Put the carton into a position.
- Press the pedal switch until the staples in the magazine stop, and then release.
NOTE: Do not press the pedal switch without the carton in its position.

