



cambridge
glazed brick tile



Charcoal

US or UK, Cambridge is a town that immediately brings to mind libraries and lecture halls rising from the riverside in stoic brickwork. These renowned college towns have a presence and stateliness that cannot be denied.


By starting with a traditional brick biscuit we achieve a feeling of antiquity and craftsmanship often missing from modern product. It hearkens to a simpler time when skilled craftspeople worked noble materials by hand. Our sumptuous translucent glaze honours the original material while imparting the unassuming luster & polish of a well tailored Harris Tweed Suit




White



Silver

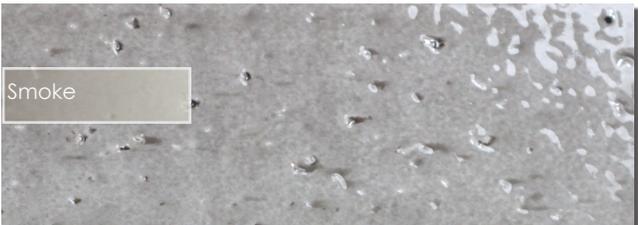

Smoke

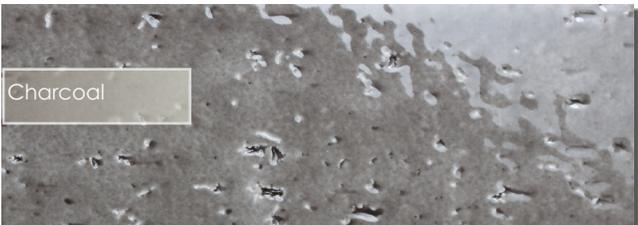

Charcoal



INSTALLATION & MAINTENANCE

- Ceramic wall tile is suitable for all interior wall or ceiling applications including wet areas. Not suitable for demanding environments such as steam showers
- All products should be inspected prior to installation for any defects or unacceptable color/shade variation. Claims will not be accepted after installation
- Proper substrates, preparation and installation materials are required for a successful installation. For reference please see the TCNA 09300 Tile Handbook
- Non sanded grouts are recommended for high gloss wall tiles
- Ensure all grout haze is buffed off before 48 hours have elapsed after installation
- Glazed tile should not be treated with a sealer for any reason
- To clean glazed ceramic wall tile, use a damp sponge with warm water. For heavy cleaning, use a non abrasive cleaner with a damp sponge



Silver | Smoke | Charcoal

TECHNICAL SPECIFICATIONS

Technical Characteristics	ASTM Test Result	ASTM/ANSI Test Method
Water Absorption %	<3%	A 187.1
Dimensionality (flatness, warpage, straightness, etc.)	premium grade conformance	ISO 10545-2 A 187.1
Thermal Shock & Crazeing Resistance	Pass	ISO 10545- 9/11
Resistance to Stains, chemicals acids, etc.	Pass	ISO 10545- 13/14

PACKAGING

Sheet Size	PC/ CTN	Sqft/ctn (Sqm/ctn)	Carton/ Pallet	Sqft/plt (Sqm/plt)	Lbs/ctn (Kgs/ctn)	Lbs/plt (Kgs/plt)
2.5x9.5" (60x240)	30	5.3 (0.49)	90	477.00 (44.10)	22.05 (10.00)	1984.50 (900.00)
Full Corner 9.5x9.5x2.5" (240x240x60mm)	8	2.8 (0.26)	---	---	12.13 (5.50)	---
Half Corner 4.25x4.25x2.5" (120x120x60mm)	16	2.4 (0.23)	---	---	12.13 (5.50)	---
1/3 Corner 3.5x6.5x2.5" (89x169x60mm)	16	2.76 (0.26)	---	---	12.13 (5.50)	---



WHITE



CAMB29WH

SILVER



CAMB29SI

SMOKE






CAMB29SM

CHARCOAL



CAMB29CH

TRIMS **



* Products shown in multiples. Actual items are single loose piece

** Glazed Edge trim not depicted but full sized field piece glazed on long edge only. For detailed information on utilizing the corner trims effectively including suggested joint width, layouts and ratios please visit our website