



Tool-Less Terminal Strip

The TTS Tool-less Terminal Strip is designed to minimize wiring costs while meeting UL 864 Rev. 9 Sect. 12.4 Field Wiring applications requirements. It allows for quick easy mounting of multiple connection points. The clamp connections can accommodate wire sizes ranging from 20 to 12 AWG, stranded or solid core wire, and can be easily connected by depressing the terminal tab with either a finger or screwdriver, pushing the stripped conductor into the connection point and releasing the terminal tab to secure the wire. Up to four conductors can be connected to each terminal point. There are 4 built in test ports for quick circuit trouble shooting. The terminal strip can mount into the Space Age Electronics, Inc. Accessory cabinets or the BB4 Back Box Bracket (purchased separately) or can be surface mounted.

Standard Features:

- Each package consists of 1 terminal block
- (2) 4/40 machine screws for mounting
- Accepts 20 to 12 AWG
- Rated for 25A @ 300V and 5A @ 600V
- Measures 2" L X 1-3/8" W X 7/8"H
- Built in test ports for troubleshooting
- Available in black or white.











ISO 9001

REGISTERED

COMPANY



ACER(I)

Space Age Electronics, inc. www.1SAE.com **800.486.1723** Toll Free 508.485.0966 Local 508.485.4740 Fax




Specifications:

The TTS Tool-Less Terminal Strip will be a UL recognized component. There will be four terminal poles with four quick connection points per terminal pole. It shall accommodate connections of solid or stranded and wire sizes ranging from 20 to 12 AWG. There will be four direct test ports for each pole. It will be available in black or white. It will measure

2" L X 1-3/8" W X 7/8"H. It shall be rated for 25A @ 300V and 5A @ 600V.

The TTS Tool-Less Terminal Strip was designed to improve field termination and installation time while meeting full code compliance and allowing for first round inspection sign off. Built in test ports allow for quick and easy trouble shooting. Available in black or white to help improve circuit identification.

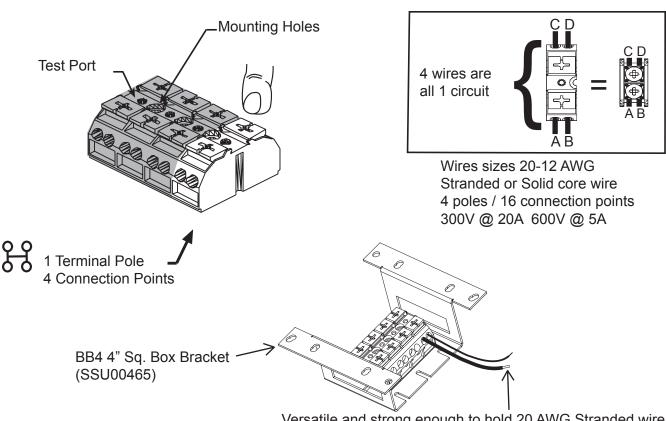

Versatile and strong enough to hold 20 AWG Stranded wire under 1 point and 12 AWG Solid under the second point.

Warning:

Do not use Aluminum Conductors with the TTS Terminals per UL 864 Rev. 9 Sect. 12.4.

Ordering Information:

Part # Description

SSU00470 TTS Tool-Less Terminal Strip (Black) SSU00471 TTS Tool-Less Terminal Strip (White)

ACER(I)X

Space Age Electronics, inc. www.1SAE.com **800.486.1723** Toll Free 508.485.0966 Local 508.485.4740 Fax

Accessories:

SSU00465 BB4 Box Bracket 4" Square SSU00472 TTP Tool-Less Test Plug



This document is subject to change without notice, see doc # ED0479 for legal disclaimer

ED0409 LT10376 Rev C 2/2