
MONOKINI CIRCUS

FLAT WALL TILE





Nominal Sizes and Colours: 4x12

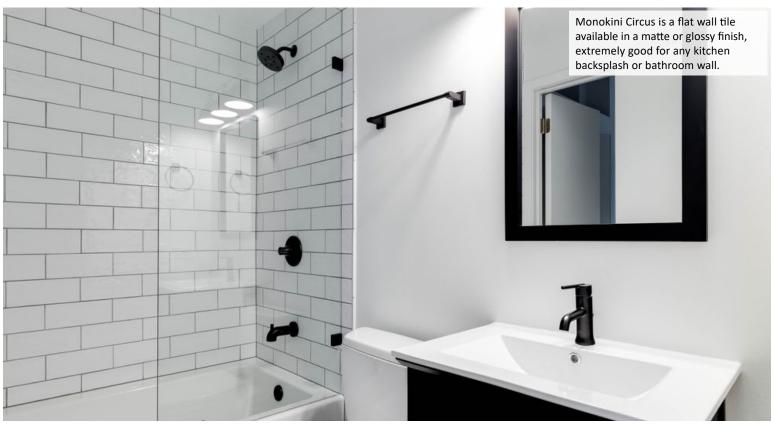








Cotswolds Dark Glossy

Cotswolds Dark Matte

Recommended applications

Residential	Bath / Shower	W Wall
Light commercial	E Fireplace	Indoor

Characteristics of tile



Technical specifications

Pattern Repeat	None - solid colour	₩ MOHS	n/a
PEI	n/a	Tile thickness	n/a
Dynamic Coefficient of Friction	n/a	Chemical Resistance	n/a
Friction Coefficient	n/a	Variation	V1 V2 V3 V4
Frost Resistance	n/a	l	Jniform
Water Absorption	> 10% - ≥ 20%	17.7%	

Special instructions

■ Shade variations between tiles is characteristic. Colour may vary from sample. For rectangular tiles, for both floor and wall, are not recommended to be installed using a 50/50 brick pattern. The only brick patterns acceptable are 40/60 or 30/70.



