


Power Supply Enclosure

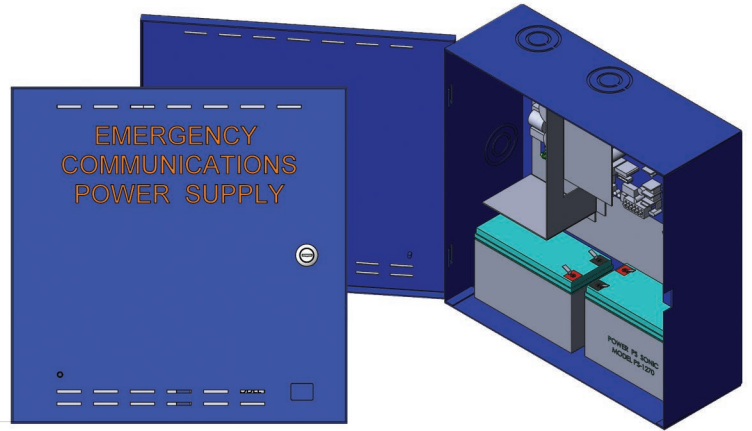

Features

- Enclosure dimensions: 13 3/4" H x 13 3/4" L x 4 3/4" D
- Constructed from 16 gauge cold rolled steel
- Converts 115VAC 60Hz input into one Class 2 power-limited 6 amp 24VDC output
- Overvoltage protection
- Built-in charger for sealed acid or gel type batteries
- Automatic switch over to standby battery when AC fails
- AC input, DC output and battery LED indicators
- AC and battery supervision (form "C" contacts)

The Power Supply Enclosure provides power and backup for your Shield30 Emergency Communication System.

Specifications

The Power Supply Enclosure is constructed of 16 gauge cold rolled steel with a blue powder coat finish. The front cover is engineered with a removable lift-a-way hinge and displays "EMERGENCY COMMUNICATIONS POWER SUPPLY" in orange indelible lettering. The Power Supply offers AC and battery supervision (form "C" contacts) with overvoltage protection. A built-in charger is included for sealed acid or gel type batteries. The Power Supply also automatically switches over to standby battery when AC fails.

Ordering Information

P/N#	Description
SPS6AB	Power Supply Enclosure