





Ø 0.750



3/4 - 10 UNC-2A

23.0 ^{+0.50}_{-0.00}

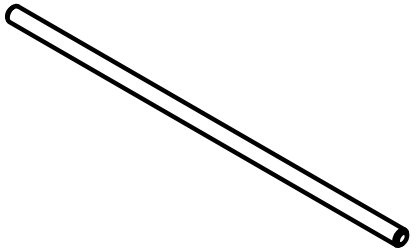

- NOTES:
- BREAK EDGES AND CORNERS
 - ADD LIGHT LAYER OF RUST PREVENTATIVE OIL. EXCESSIVE OIL THAT COMPROMISES PACKAGING OR LABELING INTEGRITY WILL NOT BE ACCEPTED.

Alternate Material: SAE J429 Grade 8 Allowed

REVISION HISTORY				GENERAL TOLERANCES		MATERIAL			ASTM A193 B7		FINISH	PLAIN W/ LIGHT OIL				
				(UNLESS OTHERWISE SPECIFIED)					NAME	DATE	TLC PN	2044369				
REV	REVISION DESCRIPTION			DATE	APPR.	IMPERIAL (in)	METRIC (mm)	DRAWN	MDB	4/15/2021	PART DESCRIPTION 3/4 - 10 X 23" FULLY THREADED STRAIGHT ROD A193 B7 PLAIN W/ LIGHT OIL PER PRINT					
A	Released for Production			4/15/2021	MDB	X ± 0.100	X ± 1.50	CHECKED	NDG	4/15/2021						
						X.X ± 0.060	X.X ± 0.80	ENG APPR	FBS	4/15/2021						
						X.XX ± 0.030	X.XX ± 0.25				SIZE B	LEGACY PN			REV A	
						X.XXX ± 0.010	ANGLES ± 2°				UNITS	IMPERIAL	X	METRIC		
						ANGLES ± 2°					SCALE: 1:2	WEIGHT: 2.869	SHEET 1 OF 1			