


Installation Instructions

1. Remove existing three-inch flange (1) that comes standard with new 3, 5, 7-1/2 and 10 H.P. InSinkErator disposers, being careful not to damage the bolts or gasket. You'll need these to install the new flange.
2. Insert gasket (2) between two-inch waste outlet reducing flange (3) and the new disposer as shown in illustration.
3. Install two-inch waste outlet reducing flange (3). Be sure to position with part number (#13847) facing upward as shown in image.
4. Secure flange to disposer using the four existing bolts (4).

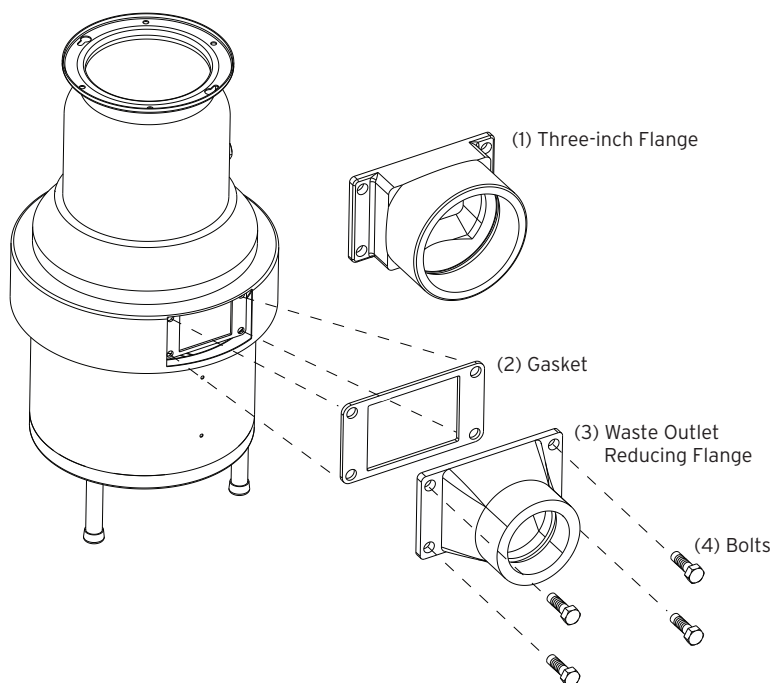

Waste Outlet Reducing Flange Installation

Waste Outlet Reducing Flange

