

PS5016LN

20GA FINE WIRE LONG NOSE STAPLER



Air Pressure: 70-110 PSI	Max Air Pressure: 120 PSI	Air Fitting Size: 1/4" NPT
--------------------------	---------------------------	----------------------------


Double Trigger

- Equipped with a trigger lock to prevent accidental firing.
- Trigger lock must be released prior to using the primary trigger (as shown).



Loading

- Turn the tool upside down.
- Press latch and pull the magazine back (as shown).
- Load the fastener strip (as shown).
- Close magazine until locked. You should feel the pressure of the pusher located inside of the magazine when the magazine is closed.
- **Magazine Capacity:** 84 fasteners.

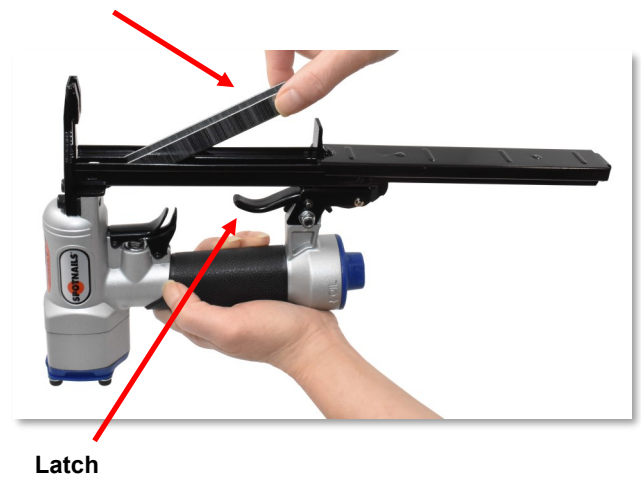

Depth Adjustment

- This tool does not have a depth adjustment.
- Reducing or increasing the air pressure will affect the depth of the drive.