IMPRONTA WHITE EXPERIENCE tierras


UNGLAZED AND GLAZED (POLISHED) PORCELAIN







Nominal Sizes and Colours

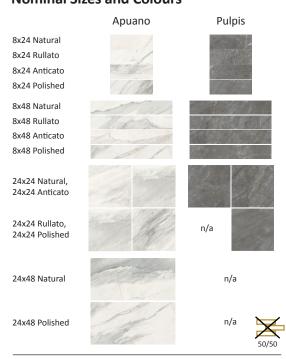

Decors and Special Pieces

4x12 Pre-mix - all finishes are combined in the same box

2x2 Mix Mosaic - all finishes are combined on the same sheet







Recommended applications

neconfinenceu applications				
Residential	Bath / Shower	₩ Wall		
Light commercial	Fireplace	Floor		
Medium commercial (Natural/Rullato/Anticato only)	Heavy commercial (Natural/Rullato/Anticato only)	Indoor		

Characteristics of til	e	
Low maintenance	Fade resistant	Resistant to fungus
Stain resistant	Eco-friendly	@ Odour resistant
Hypoallergenic		

Technical specifications

iecillicai specifica	LIUIIS		
CGSB Type	7	MOHS	n/a
PEI PEI	Polished Apuano: 5, Polished Pulpis: 4	Tile thickness	10 mm
Dynamic Coefficient of Friction	≥ 0.42	Chemical Resistance	Class UA
Friction Coefficient	Wet: ≥ 0.6 Dry: > 0.6	Variation	V1 V2 V3 V4
Frost Resistance	Yes		Moderate Substantial (Pulpis) (Apuano)
▲ Water Absorption	0.1%	ELE NO DIES	

Special instructions

Shade variations between tiles is characteristic. Colour may vary from sample.





For rectangular tiles, for both floor and wall, are not recommended to be installed using a 50/50 brick pattern. The only brick patterns acceptable are 40/60 or 30/70.