



**日來企業股份有限公司**  
**SUNLIT ENTERPRISE CO., LTD**

DRAWING NO.


ZMG58214

DATE

2025.04.07

Description.

1/4×2-1/4" Torx Drive 48 Degree Plastite Screw Zinc Trivalent Clear

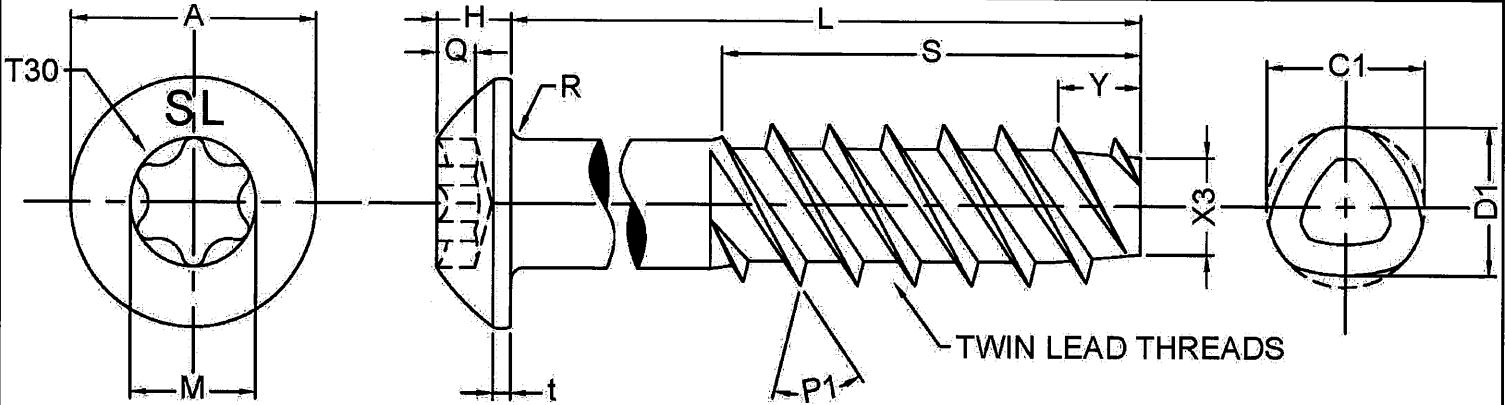

Specification		A	H	Q	M	t	S	X3	P1	Y	R	
1/4-10	Min	10.64	3.09	1.60	5.60	0.78	28.57	5.68	48°	2.54	1.00	
	Max	11.09	3.35	Min.	Ref.	Ref	33.00	Max.	Ref.	5.08	Max.	
		C1	D1									
		6.85	6.65									
		7.01	6.80									

Nominal length	2-1/4
L	55.88
	58.42

**Remark :**

- Screw: 1022AK, CASE-HARDEN  
 -Core Hardness:HRC 28-38  
 -Case hardness: HRC 45 Min.  
 -Case depth: 0.005"-0.011"
- Finish: Zinc Clear Cr3, min 5 microns, 72hrs to white & 110hrs to red

REVISED					
---------	--	--	--	--	--

Draft	<i>Addey</i>	Check		Confirm	
-------	--------------	-------	--	---------	--