



## Drop-In 4/3-Size Heated Wells

Models: HWBL-43, -43D, -43DA  
 HWBLI-43, 43D  
 HWB-43, 43D, 43DA  
 HWBI-43, -43D  
 HWBH-43, -43D, -43DA  
 HWBHI-43, -43D

Convenient 4/3-Sized Wells hold heated foods at safe serving temperatures. Like the full-size models, Hatco units offer a larger drain, more consistent holding temperatures, heavier stainless steel construction, easier-to-service design for quick change of components, and a remote thermostat with separate power switch.


### Standard features

- Rectangular 4/3-Size Wells, uninsulated or insulated
- Controls feature a separate lighted ON/OFF rocker switch and temperature dial, allowing preset temperatures to be maintained
- Low (120V only), Standard and High Watt
- Available with or without a drain (easy to clean with larger drain and flat screen)
- Easy access design allows for quick element or thermostat change

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

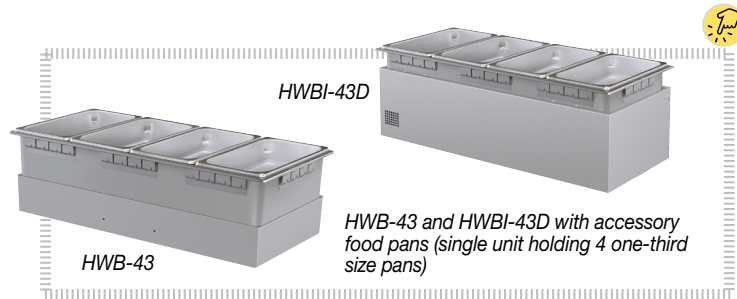

### Options (available at time of purchase only)

- ☐ Additional High Temp Power Supply Lead Wire available in one foot (305 mm) increments (Lead wire only – the lead wire extensions beyond the standard 3' conduit whip) *Models are shipped standard with 1' [305 mm] of lead wire extensions*
- Flexible Conduit between the control and the Rectangular Heated Well
  - ☐ Standard Flexible Conduit, 36" (914 mm)
  - ☐ Flexible Conduit, 72" (1829 mm)
- Control Box (Options not available for Auto-fill):
  - ☐ Standard (Compact) Thermostat with 6' (1829 mm) Capillary
  - ☐ ITC Control with Large Control (Not available for low watt, auto-fill configurations or units without a drain)
  - ☐ Larger Recessed Thermostatic Control (Standard for 220/240V and not available for auto-fill configurations)
  - ☐ WM Control Assembly Replacement (Not available for export models or auto-fill)
- Control Box Bezel in *Designer Colors* (Nonstandard colors are non-returnable, Stainless Steel standard)
  - ☐ Warm Red ☐ Black ☐ Gray Granite ☐ White Granite
  - ☐ Navy Blue ☐ Hunter Green ☐ Antique Copper
- Left or Right Water Fill Hole for HWBL-, HWB-, HWBH-43DA only (Front is standard)
  - ☐ Right ☐ Left

### Accessories

- Rectangular Full-Size Stainless Steel Food Pans:
  - ☐ Third-Size (2.5" [64 mm] H) ☐ Half-Size (2.5" [64 mm] H)
  - ☐ Full-Size (2.5" [64 mm] H) ☐ Full-Size (4" [101 mm] H)
  - ☐ Full-Size (6" [152 mm] H)
- Round Food Pans:
  - ☐ 11 Quart (10 Liter)
- Hinged Lid for Round Pans:
  - ☐ 11 Quart (10 Liter)
- Notched Lid for Round Pans:
  - ☐ 11 Quart (10 Liter)
- Stainless Steel Wire Trivets: ☐ Half-Size ☐ Full-Size
- Plated Wire Trivets: ☐ Half-Size ☐ Full-Size
- ☐ Adapter to Convert Warmers to hold Round Pans which holds two 11-Quart (10-Liter) Inserts
- Support Bars: ☐ 12" (305 mm) ☐ 20" (508 mm)
- ☐ Mounting Kit for Combustible Countertops
- ☐ 3/4" Ball Valve for Unit with Drains
- ☐ 3/4" Gate Valve for Unit with Drains
- ☐ Heated Well Remote Handle for 3/4" drains (Includes a Ball Valve)



IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See [www.hatcocorp.com/antimicrobial-paint](http://www.hatcocorp.com/antimicrobial-paint) for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.



**HATCO CORPORATION**

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)



# Drop-In 4/3-Size Heated Wells


Models: HWBL-43, -43D, -43DA, HWBLI-43, -43D, HWB-43, -43D, -43DA, HWBI-43, -43D, HWBH-43, -43D, 43DA, HWBHI-43, -43D

## Ordering Instructions *(Please specify the following with each order)*

- Desired Voltage:** 120, 208, 220 or 240V  
(export voltage available)
- Base Size of Heated Well**  
A. 12" x 27" (305 x 686 mm)
- Drain** (With or without)
- Auto-fill** (With or without)  
Location on HWB-43DA only  
A. Front (Standard)  
B. Left  
C. Right
- Insulated or Uninsulated**
- Wattage**  
A. High Watt  
B. Standard Watt  
C. Low Watt (120V only)
- Agency:**  
A. UL, C-UL  
B. UL-EPH (Sanitary listing)  
C. CE mark available


### HWB-43 Series

(Uninsulated)

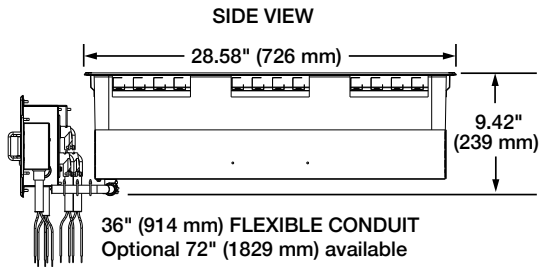

### HWBI-43 Series


(Insulated)

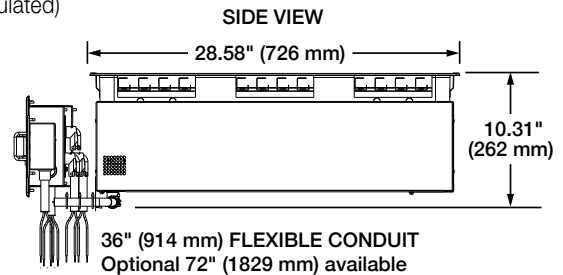

### HWB-, HWBI-43 Series

Front View for  
Uninsulated and insulated


AVAILABLE  
CONTROL BOXES  
(Not for auto-fill)






FRONT VIEW

- STANDARD CONTROL**
- Not for auto-fill or export voltages
  - Bezel available in *Designer Colors* and Stainless Steel


With or without bezel available  
(Shown with bezel)




| OPTIONAL CONTROLS<br>(Not for auto-fill) | ITC Control                                                                                                                                                                                                                                                                                                                                                                                                            | WM Replacement Assembly                                                                                                                                                                                                                                                                                        | Larger Recessed<br>Thermostatic Control                                                                                                                                                                                                                                                                                                        |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                          | <ul style="list-style-type: none"><li>• Not for CE voltages or low watt configurations</li><li>• Available for "wet" models w/optional coupling only</li><li>• Bezel available in <i>Designer Colors</i> or Stainless Steel</li></ul>  <p>7.81" (198 mm) height, 6.39" (162 mm) width, 4.56" (116 mm) depth. 10° CONTROL PANEL.</p> | <ul style="list-style-type: none"><li>• Not for export voltages</li><li>• Bezel available in <i>Designer Colors</i> or Stainless Steel</li></ul>  <p>6.25" (159 mm) height, 5.875" (149 mm) width, 3.86" (98 mm) depth.</p> | <ul style="list-style-type: none"><li>• <b>STANDARD FOR EXPORT VOLTAGES</b></li><li>• Bezel available in <i>Designer Colors</i> or Stainless Steel</li></ul>  <p>7.81" (198 mm) height, 6.39" (162 mm) width, 3.83" (97 mm) depth. 10° CONTROL PANEL.</p> |

### HWB-43DA Series (Uninsulated with Auto-fill)

FRONT VIEW

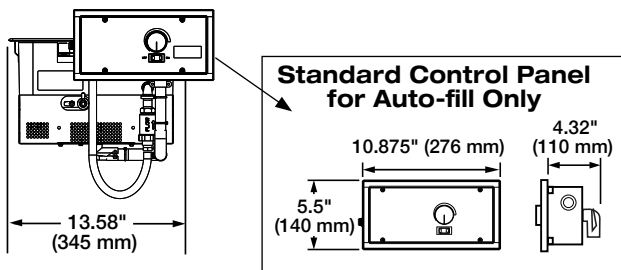

SIDE VIEW

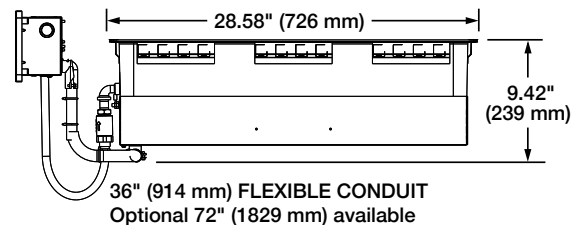

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)


[Patents](#)

[Chat](#)



# Drop-In 4/3-Size Heated Wells

Models: HWBL-43, -43D, -43DA, HWBLI-43, -43D, HWB-43, -43D, -43DA, HWBI-43, -43D, HWBH-43, -43D, 43DA, HWBHI-43, -43D

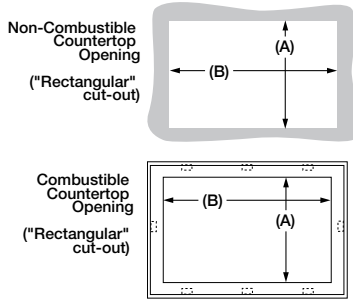

## Cutout Dimensions for Non-Combustible Countertops

| Model          | Minimum Width (A) | Maximum Width (A) | Minimum Depth (B) | Maximum Depth (B) |
|----------------|-------------------|-------------------|-------------------|-------------------|
| HWB-43 Series  | 12.687" (323 mm)  | 12.938" (328 mm)  | 27.687" (704 mm)  | 28" (711 mm)      |
| HWBI-43 Series | 12.687" (323 mm)  | 12.938" (328 mm)  | 27.687" (704 mm)  | 28" (711 mm)      |

## Cutout Dimensions for Combustible Countertops<sup>▲</sup>

| Model                | Minimum Width (A) | Maximum Width (A) | Minimum Depth (B) | Maximum Depth (B) |
|----------------------|-------------------|-------------------|-------------------|-------------------|
| HWB-, HWBI-43 Series | 14" (356 mm)      | 14.25" (362 mm)   | 29" (737 mm)      | 29.25" (742 mm)   |

▲ Accessory Mounting Kit required for Top Mounts

## Cutout Dimensions for Control Boxes

| Control Box                           | Width (A)        | Height (B)      | International Models |
|---------------------------------------|------------------|-----------------|----------------------|
| Standard Thermostatic without bezel   | 2.16" (55 mm)    | 3.375" (86 mm)  | Not available        |
| Standard Thermostatic with bezel      | 3.25" (83 mm)    | 3.75" (95 mm)   | Not available        |
| Optional Larger Recessed Thermostatic | 5.875" (149 mm)  | 6.375" (162 mm) | Standard             |
| Optional ITC Electronic               | 5.875" (149 mm)  | 6.375" (162 mm) | Optional             |
| Optional WM Assembly Replacement      | 4.78" (121 mm)   | 5.00" (127 mm)  | Not available        |
| Standard Auto-fill                    | 10.125" (257 mm) | 4.75" (121 mm)  | Standard             |

## Drop-In 4/3-Size Heated Well Models

The shaded areas contain electrical information for International models only

| Low Watt      | Model               | Dimensions<br>(Width x Depth x Height)           | Volts        | Phase  | Watts     | Amps    | Control Configuration             |                                                                                                | Ship Weight*    |
|---------------|---------------------|--------------------------------------------------|--------------|--------|-----------|---------|-----------------------------------|------------------------------------------------------------------------------------------------|-----------------|
|               |                     |                                                  |              |        |           |         | Standard                          | Optional                                                                                       |                 |
|               | HWBL-43             | 13.58" x 28.58" x 9.42"<br>(345 x 726 x 239 mm)  | 120          | Single | 750       | 6.3     | Compact Thermostatic (with bezel) | WM Assembly or Larger Recessed Thermostatic                                                    | 35 lbs. (16 kg) |
|               | HWBL-43D            |                                                  |              |        |           |         |                                   |                                                                                                | 24 lbs. (11 kg) |
|               | HWBL-43DA           |                                                  |              |        |           |         | Auto-fill                         | None                                                                                           | 36 lbs. (16 kg) |
|               | HWBLI-43            | 13.58" x 28.58" x 10.31"<br>(345 x 726 x 262 mm) |              |        |           |         | Compact Thermostatic (with bezel) | WM Assembly or Larger Recessed Thermostatic                                                    | 33 lbs. (15 kg) |
|               | HWBLI-43D           |                                                  |              |        |           |         |                                   |                                                                                                | 31 lbs. (14 kg) |
| Standard Watt | HWB-43<br>HWB-43D   | 13.58" x 28.58" x 9.42"<br>(345 x 726 x 239 mm)  | 120          | Single | 1200      | 10.0    | Compact Thermostatic (with bezel) | WM Assembly, Larger Recessed Thermostatic or ITC Electronic Control ( <i>wet models only</i> ) | 24 lbs. (11 kg) |
|               |                     |                                                  | 208          |        |           | 5.8     |                                   |                                                                                                |                 |
|               |                     |                                                  | 240          |        |           | 5.0     |                                   |                                                                                                |                 |
|               |                     |                                                  | 220          | Single | 1200      | 5.5     | Larger Recessed Thermostatic      | ITC Electronic Control ( <i>wet models and non-CE only</i> )                                   |                 |
|               |                     |                                                  | 220-230 (CE) |        | 1200-1312 | 5.5-5.7 |                                   |                                                                                                |                 |
|               |                     |                                                  | 240          |        | 1200      | 5.0     |                                   |                                                                                                |                 |
|               |                     |                                                  | 230-240 (CE) |        | 1102-1200 | 4.8-5.0 |                                   |                                                                                                |                 |
|               | HWB-43DA            | 13.58" x 28.58" x 9.42"<br>(345 x 726 x 239 mm)  | 120          | Single | 1215      | 10.1    | Auto-fill                         | None                                                                                           | 27 lbs. (12 kg) |
|               |                     |                                                  | 208          |        |           | 5.8     |                                   |                                                                                                |                 |
|               |                     |                                                  | 240          |        |           | 5.1     |                                   |                                                                                                |                 |
|               |                     |                                                  | 220          | Single | 1215      | 5.5     | Auto-fill                         | None                                                                                           |                 |
|               |                     |                                                  | 220-230 (CE) |        | 1215-1312 | 5.5-5.7 |                                   |                                                                                                |                 |
|               |                     |                                                  | 240          |        | 1215      | 5.1     |                                   |                                                                                                |                 |
|               |                     |                                                  | 230-240 (CE) |        | 1116-1215 | 4.9-5.1 |                                   |                                                                                                |                 |
|               | HWBI-43<br>HWBI-43D | 13.58" x 28.58" x 10.31"<br>(345 x 726 x 262 mm) | 120          | Single | 1200      | 10.0    | Compact Thermostatic (with bezel) | WM Assembly, Larger Recessed or ITC Electronic Control ( <i>wet models only</i> )              | 30 lbs. (14 kg) |
|               |                     |                                                  | 208          |        |           | 5.8     |                                   |                                                                                                | 31 lbs. (14 kg) |
|               |                     |                                                  | 240          |        |           | 5.0     |                                   |                                                                                                |                 |
|               |                     |                                                  | 220          | Single | 1200      | 5.5     | Larger Recessed Thermostatic      | ITC Electronic Control ( <i>wet model and non-CE only</i> )                                    |                 |
|               |                     |                                                  | 220-230 (CE) |        | 1200-1312 | 5.5-5.7 |                                   |                                                                                                |                 |
|               |                     |                                                  | 240          |        | 1200      | 5.0     |                                   |                                                                                                |                 |
|               |                     |                                                  | 230-240 (CE) |        | 1102-1200 | 4.8-5.0 |                                   |                                                                                                |                 |

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)



# Drop-In 4/3-Size Heated Wells

Models: HWBL-43, -43D, -43DA, HWBLI-43, -43D, HWB-43, -43D, -43DA, HWBI-43, -43D, HWBH-43, -43D, 43DA, HWBHI-43, -43D

## Drop-In 4/3-Size Heated Well Models

The shaded areas contain electrical information for International models only

|                       | Model                                            | Dimensions<br>(Width x Depth x Height)          | Volts        | Phase     | Watts     | Amps                                    | Control Configuration                                                                                  |                                                                                                    | Ship<br>Weight* |
|-----------------------|--------------------------------------------------|-------------------------------------------------|--------------|-----------|-----------|-----------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------|
|                       |                                                  |                                                 |              |           |           |                                         | Standard                                                                                               | Optional                                                                                           |                 |
| High Watt             | HWBH-43<br>HWBH-43D                              | 13.58" x 28.58" x 9.42"<br>(345 x 726 x 239 mm) | 120          | Single    | 1650      | 13.8                                    | Compact<br>Thermostatic<br>(with bezel)                                                                | WM Assembly, Larger Recessed<br>Thermostatic or ITC Electronic<br>Control <i>(wet models only)</i> | 24 lbs. (11 kg) |
|                       |                                                  |                                                 | 208          |           |           | 7.9                                     |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 240          |           |           | 6.9                                     |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 220          | Single    | 1650      | 7.5                                     | Larger<br>Recessed<br>Thermostatic                                                                     | ITC Electronic Control <i>(wet models<br/>and non-CE only)</i>                                     |                 |
|                       |                                                  |                                                 | 220-230 (CE) |           | 1650-1803 | 7.5-7.8                                 |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 240          |           | 1650      | 7.5                                     |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 230-240 (CE) |           | 1515-1650 | 6.6-6.9                                 |                                                                                                        |                                                                                                    |                 |
|                       | HWBH-43DA                                        | 13.58" x 28.58" x 9.42"<br>(345 x 726 x 239 mm) | 120          | Single    | 1665      | 13.9                                    | Auto-fill                                                                                              | None                                                                                               | 30 lbs. (14 kg) |
|                       |                                                  |                                                 | 208          |           |           | 8.0                                     |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 240          |           |           | 6.9                                     |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 220          | Single    | 1665      | 7.6                                     | Auto-fill                                                                                              | None                                                                                               |                 |
|                       |                                                  |                                                 | 220-230 (CE) |           | 1663-1817 | 7.6-7.9                                 |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 240          |           | 1665      | 6.9                                     |                                                                                                        |                                                                                                    |                 |
|                       |                                                  |                                                 | 230-240 (CE) |           | 1530-1665 | 6.6-6.9                                 |                                                                                                        |                                                                                                    |                 |
| HWBHI-43<br>HWBHI-43D | 13.58" x 28.58" x 10.31"<br>(345 x 726 x 262 mm) | 120                                             | Single       | 1650      | 13.8      | Compact<br>Thermostatic<br>(with bezel) | WM Assembly,<br>Larger Recessed Thermostatic or<br>ITC Electronic Control <i>(wet models<br/>only)</i> | 30 lbs. (14 kg)                                                                                    |                 |
|                       |                                                  | 208                                             |              |           | 7.9       |                                         |                                                                                                        |                                                                                                    |                 |
|                       |                                                  | 240                                             |              |           | 6.9       |                                         |                                                                                                        |                                                                                                    |                 |
|                       |                                                  | 220                                             | Single       | 1650      | 7.5       | Larger<br>Recessed<br>Thermostatic      | ITC Electronic Control <i>(wet models<br/>and non-CE only)</i>                                         |                                                                                                    |                 |
|                       |                                                  | 220-230 (CE)                                    |              | 1650-1803 | 7.5-7.8   |                                         |                                                                                                        |                                                                                                    |                 |
|                       |                                                  | 240                                             |              | 1650      | 7.5       |                                         |                                                                                                        |                                                                                                    |                 |
|                       |                                                  | 230-240 (CE)                                    |              | 1515-1650 | 6.6-6.9   |                                         |                                                                                                        |                                                                                                    |                 |

## PRODUCT SPECS

### Drop-In 4/3-Size Heated Well

The Drop-In 4/3-Size Heated Well shall be a Model ....as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

Drop-in 4/3-Size Heated Well shall be rated at ....watts, ....volts, and be....inches (millimeters) in overall width and be ....inches (millimeters) in overall depth. It shall consist of stainless and aluminized steel housing with a metal sheathed heating

element, EZ locking hardware for installation, and a remote thermostat with lighted power switch.

Accessories may include stainless steel mounting kit, adapter top, support bars, food pans, trivets, remote handle and valves.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

**HATCO CORPORATION**

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)