



your global source for unique lighting + home decor

ASSEMBLY INSTRUCTIONS

1. Place all parts on a flat smooth surface and start the Lamp assembly
2. Install the crystal decoration(A/B/C/D) as diagram
3. Install BULBS(K) (Not included)

⚠ CAUTION - Refer to the wattage caution label located near the lamp holder for maximum wattage - do not exceed the maximum wattage

4. Lamp installation

⚠ CAUTION - Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock

5. Attached nipple(G) to the mounting bracket(A), then secure with a washer and hex nut.

6. Secure mounting plate (A) to outlet box with the mounting screws (B).

7. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain. Then connect one end of chain with the loop(I) by using the loop lock(H).

8. Screw the screw collar loop(F) to the nipple(G) tightly.


9. Thread the fixture wire and fixture grounding wire through the collar(F), canopy(E), nipple(G), and mounting bracket(A).

10. Connect the other end of the chain with the collar(F) by using the loop lock(H).

11. Wiring: Connect fixture wires by using wire connectors(D): the smooth wire (marked) from the fixture to black wire, the ridged wire (unmarked) from the fixture to white wire and grounding wire to mounting bracket with green grounding screw(C). Carefully tuck the wires back into the outlet box.

12. Attached canopy(E) to the mounting bracket(A), then tighten it with the screw collar loop(F).

13. Secure the loop(I) with lamp body(J) tightly.

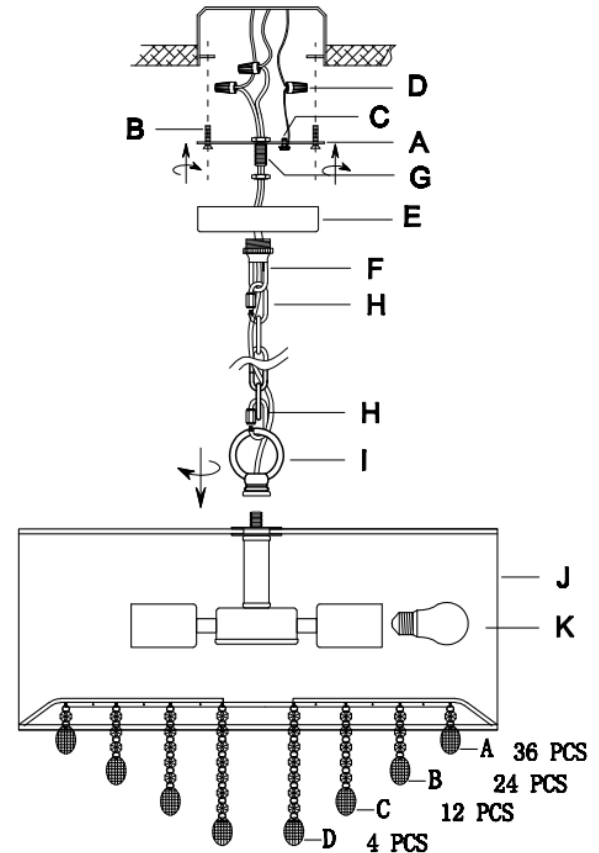

CARE INSTRUCTIONS - Use only a soft cloth; do not use any chemicals or abrasive cleaners.

MADE IN CHINA

E26 Type A - 60W X 3 (Not included)

E26 CFL - 13W X 3 (Not included)

