

PRODUCT DATA SHEET

30/60 MESH



TYPICAL CHEMICAL ANALYSIS

Element	Presenting As	Conc. %
Silica*	SiO ₂	38%
Iron	Fe ₂ O ₃	35%
Alumina	Al ₂ O ₃	21%
Magnesium	MgO	6%
Calcium	CaO	2%
Manganese	MnO	1%
Titanium	TiO ₂	< 0.5%
Chlorides^	Cl-	7-15pmm

*Silica that is bound within the lattice of the garnet crystal and not free crystalline silica


^Chloride's limit of 25pmm

TYPICAL PHYSICAL CHARACTERISTICS

Property	Value
Specific Gravity	4.1
Bulk Density	2.2 T/m ³
Hardness	7 - 8 mohs
Melting Point	1,250°C / 2,250°F
Conductivity	10 - 15 mS/m
Particle Shape	Sub Angular
Fracture	Sub Conchoidal
Moisture Absorption	Nil
Magnetic Susceptibility	600 gauss
Radioactive	Non-Radioactive

TYPICAL MINERAL COMPOSITION

Mineral		Conc. %
Garnet (Almandine)	Fe ₃ Al ₂ (SiO ₄) ₃	≥ 97%
Ilmenite	FeTiO ₃	< 1%
Zircon	ZrSiO ₄	< 0.1%
Crystalline Silica (free)	SiO ₂	< 0.1%
Other		< 1%

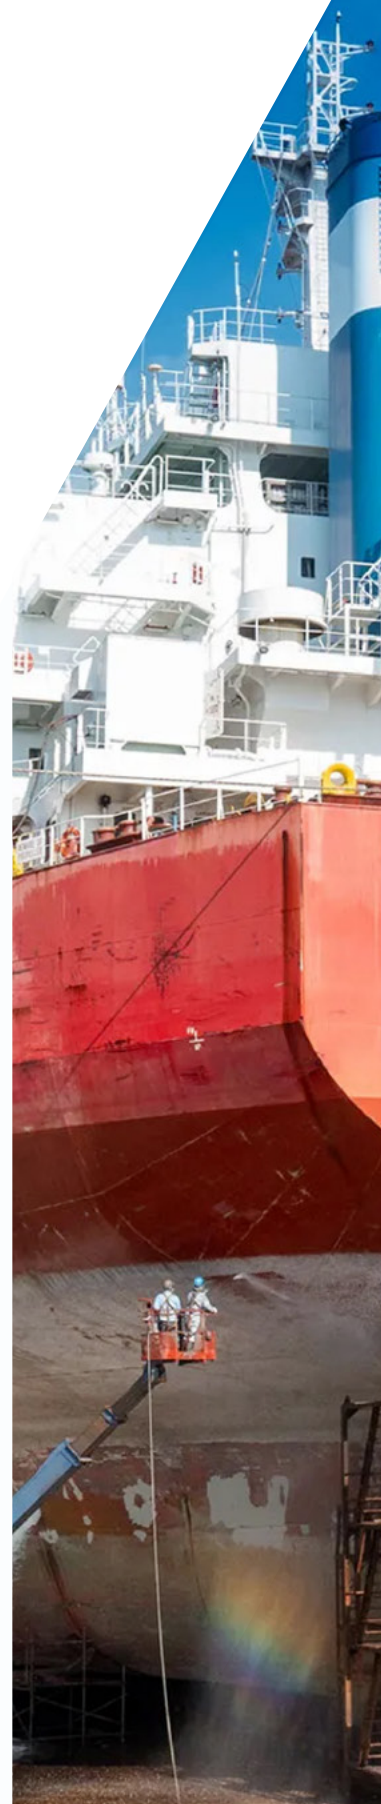


PRODUCT DATA SHEET


30/60 MESH

TYPICAL PARTICLE SIZING

DISCRETE % OF PARTICLE RETAINED

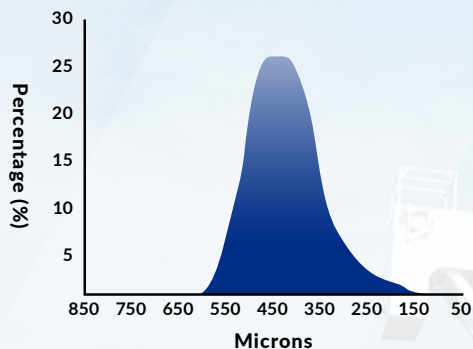

CUMULATIVE % OF PARTICLE RETAINED

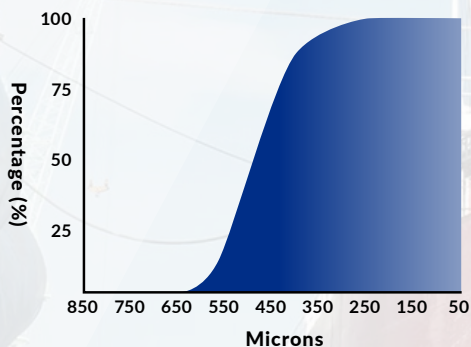

PRODUCT PACKAGING

25KG PAPER BAGS

1 TONNE BULK BAGS

2 TONNE BULK BAGS

CERTIFICATIONS

US MIL-SPEC (QPL): MIL-PRF-22262C

SSPC-AB1 INCLUDING APPENDIX B

ISO 9001/14001/45001

DISTRIBUTOR DETAILS

CESCO[®]
BlastandPaint.com

EMAIL: abrasives@blastandpaint.com



843-760-3000

7251 Cross County Road
N. Charleston, SC 29418

A PRODUCT BY:

