



Preferred Parts

Number:	CM-010
Date Issued:	A-OCT05

ELECTRONIC DOCUMENT IN THE VIEWER IS CONTROLLED. PRINTED COPY IS AN UNCONTROLLED DOCUMENT.

PAN HEAD MACHINE SCREWS
METRIC SERIES
DIMENSIONAL REQUIREMENTS
(Superseded)

This standard has been superseded by CNH Standard Parts, STPC510 (87355931), Machine Screws Metric Coarse - Preferred and Non-Preferred.

The controlled versions of CNH specifications and standards are published on the CNH Intranet site.


The documents are also available on the CNH electronic viewing system (e.g. eViewer). Suppliers are able to access these documents on CSCN (CNH Supplier Communications Network).

The superseded standard remains available for viewing following this page if needed.

Supersedes Issue: CM-010	Dated: NOV 00	Page: 1 of 2
-----------------------------	------------------	-----------------

ELECTRONIC DOCUMENT IN THE VIEWER IS CONTROLLED. PRINTED COPY IS AN UNCONTROLLED DOCUMENT.

PAN HEAD MACHINE SCREWS METRIC SERIES DIMENSIONAL REQUIREMENTS (Superseded)

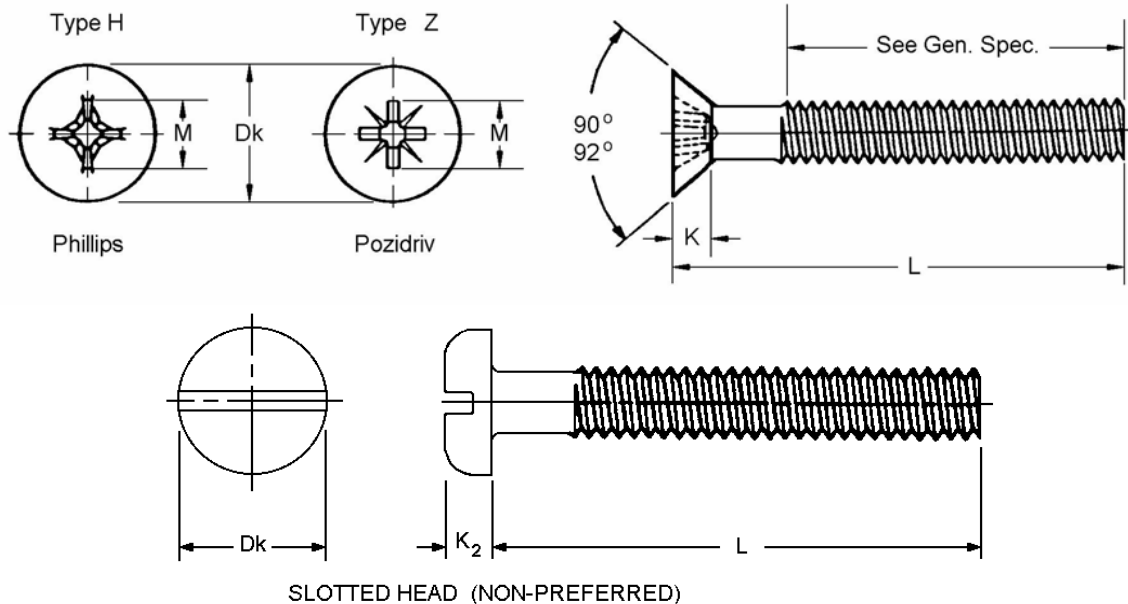

Dimensions are in millimetres

Nomina l Size	Pitch	Dk		K1	K2	M Ref		Drive Point No.
		Head Diameter		Head Ht. Cross Res.	Head Ht. Slotted	Recess Diameter		
		Max.	Min.	Max.	Max.	Type H	Type Z	
M3	0.5	5.6	5.3	2.4	1.8	3.0	2.8	1
M4	0.7	8.0	7.64	3.1	2.4	4.4	4.3	2
M5	0.8	9.5	9.14	3.7	3.0	4.9	4.7	2
M6	1.0	12.0	11.57	4.6	3.6	6.9	6.7	3
M8	1.25	16.0	15.57	6.0	4.8	9.0	8.8	4
M10	1.50	20.0	19.48	7.5	6.0	10.1	9.9	4

For complete dimensions of pan head machine screws refer to ISO 1580, 7045.

For General Specifications, See CM-001.