



JMI PUMP SYSTEMS

Your Partners in Pumping Since 1958

W194 N11695 McCormick Drive

Germantown, WI 53022

262-253-1353 • 800-234-5490

www.jmipumps.com • sales@jmipumps.com

SUBMERSIBLE AC PRIMARY & 12 VOLT DC BATTERY BACK-UP PACKAGED SYSTEM

Model JMI-POM-VMAC-LW

FEATURES

- PVL-EC-VMAC; 1/3 HP, AC primary pump
50 GPM / 3,000GPH @ 10' TDH / Vertical style switch with piggyback plug
- JMI-POM; 12V, DC, battery back-up pump
39 GPM / 2,340 GPH @ 10' TDH / Diaphragm pressure switch
- Best in class 4-Stage, 10A Controller/Charger, AC Relay
 - DC Pump cycles continuously with AC power present (Protected during primary pump failure & excessive water inflow)
 - Battery remains fully charged with AC power present (Protected during power outages)
 - Pre-programmed with contractor contact info
 - Self-tests weekly
 - Recharged LW Battery 40+ times from empty in testing
 - Fully recharged LW Battery from empty in 8-10 hours
 - Advanced LED Display tracks Run Count, Run Total, AC Fail # & displays alarm condition codes
 - Auxiliary contacts for WiFi alarm
- Includes AZP-BATTERY-LW, Battery Box
 - High performance AGM battery (maint. free); Group 29/31
- Includes (2) Check Valves, 1-1/2" Discharge Piping, Fittings & PVC mounting kit (backplate, screws, washers)

EMERGENCY BACK-UP PROTECTION

POWER OUTAGES

- Storms
- Electrical problems

EXCESSIVE WATER INFLOW

- Heavy rain
- Overloaded system

PRIMARY PUMP FAILURE

- Mechanical malfunction
- Pump obstructions

NOTE:

- UL approved charging system
- As battery discharges, pump capacity decreases
- Please refer to the owner's manual



Sumplicity™

“When it pours, we reign™”

Good [Better] Best



3-Year
Warranty



Quality
Tested




Safety Stock
Program



Private
Label



“No Problem”
Service

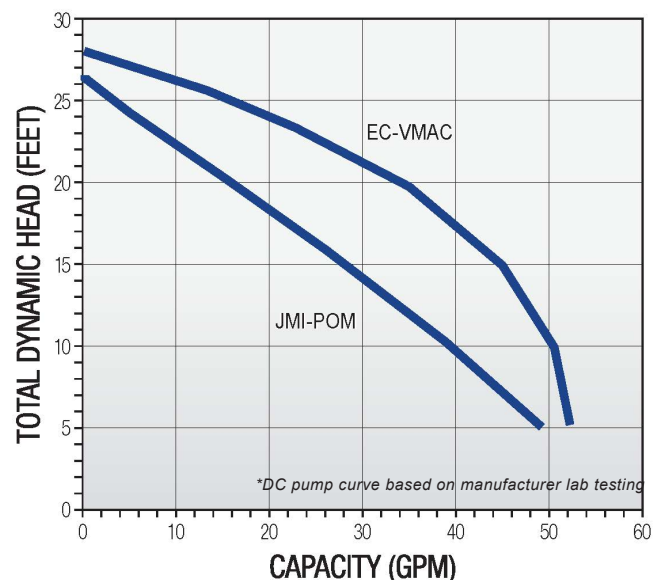

Specifications subject to change without notice

JMI-POM-VMAC-LW Rev6:062526